

Zeitschrift: Technische Mitteilungen / Schweizerische Post-, Telefon- und Telegrafenbetriebe = Bulletin technique / Entreprise des postes, téléphones et télégraphes suisses = Bollettino tecnico / Azienda delle poste, dei telefoni e dei telegraфи svizzeri

Herausgeber: Schweizerische Post-, Telefon- und Telegrafenbetriebe

Band: 73 (1995)

Heft: [1]: Spezial Edition ATM

Artikel: The access network

Autor: [s. n.]

DOI: <https://doi.org/10.5169/seals-876024>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 28.07.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

ATM NETWORK INFRASTRUCTURE

THE ACCESS NETWORK

The Swiss Telecom PTT offers under the product group name SwissWAN, among others, services via their ATM network. The access to the ATM core network covering Switzerland is established via so-called service multiplexers (SM) and the Digital Service Unit (DSU) of the ATM network. The main requirement for the network element SM is an equipment structure flexibly adaptable to varying user needs.

Telecom PTT has chosen the Siemens Albin Ltd company in Zurich to deliver equipment for the ATM terminals of the connection area, one of the reasons being the realizable, operationally uniform concept for the leased-line network MilaNet and the ATM network of SwissWAN.

ATM access switch SM 36150

Within the ATM access network of SwissWAN, the product SIMUX 36150 ATMnet access switch of the product manufacturer Newbridge Networks Corporation, Canada, is used. The SIMUX equipment is, owing to its modular concept and the many available services and interfaces, well suited as an access terminal within SwissWAN. The SM 36150 combines the adaptation function, i.e. the adaptation of non-ATM-conform data streams to the ATM cell format, with an integrated ATM switching matrix and the required ATM line interfaces in a compact 19"-rack (Fig.1). Depending on the requirements, network elements with 4, 6, 8 or 16 usable slots are available. The SM 36150

contains a switching matrix of corresponding size with the same number of STM-1 equivalents.

The central plug-in units such as the controller and the power supply unit

and also the ATM switching units can be redundantly equipped as needed, leading to a very high availability of the services offered.

The SM 36150 comes in two versions: either in a cabinet version to be placed on the customer's premises with a 240-V power supply or in a rack version for the implementation into racks at the network operator's site with a power supply of 240 V AC or 48 V DC. Figure 2 shows the SM 36150 in a redundant 8-port-rack version.

Switching Matrix

Owing to the switching matrix, the SM 36150 allows for the concentration of ATM cells; the local switching of paths between connected users is also possible. The switching matrix consists of a matrix of switching modules each capable of switching the ATM cells of 4 ports with 155 MBit/s

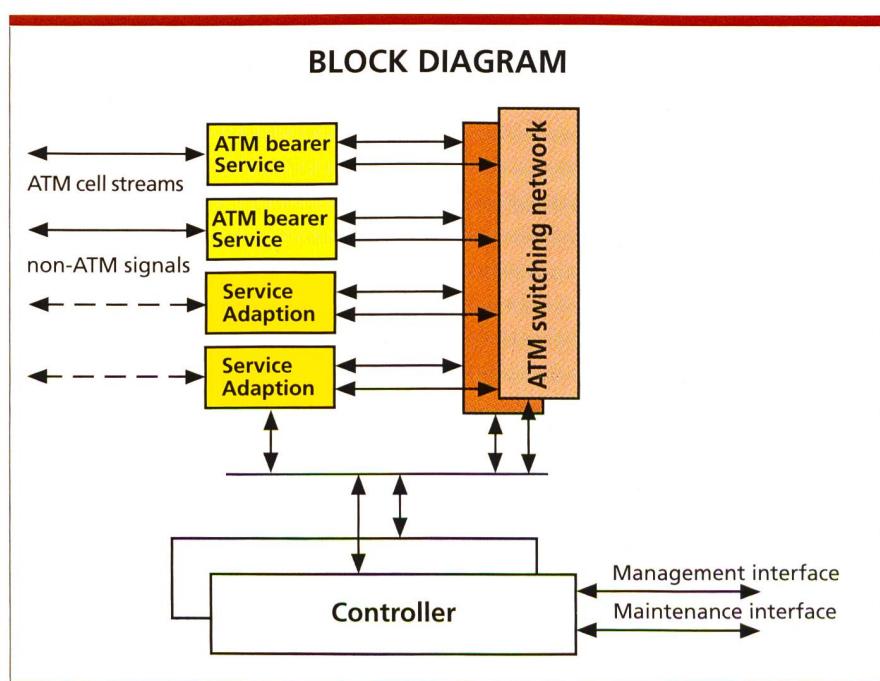


Fig. 1. Block diagram of a service multiplexer.



Fig. 2. Service multiplexer 36150 in the redundant 8-portrack Version

without blocking. It is capable of multicasting, and it works self-routing. The switching path for every ATM cell is predetermined by the routing table. Switching is done on the hardware level with the determined high speed.

The switching matrix supports two QoS (Quality of Service). Paths with critical delay requirements, such as used for speech or video applications, are switched with a higher priority than uncritical paths, being used e.g.

for data transmission. In the case of temporary collision, which can occur due to the bursty nature of data transmission, the cells of time-critical connections are handled with priority.

ATM Digital Service Unit (DSU)

In the first phase, the SMDS (Switched Multi-megabit Data Service) service is established over a DSU from Digital Link Corporation. This is only a temporary solution until the SMDS service of SM (service multiplexer) is supported from Newbridge.

The DSU enables SMDS via a V.35 interface or an HSSI (High-Speed-Serial Interface) with the DXI (Data exchange Interface) protocol. The access to the ATM network is realized by means of a E3/ATM interface. A router is usually connected to the DTE (Data Terminal Equipment) interface. The router hands its data (datagrams of up to 9232 octets) over to the DSU. These datagrams contain the complete target address in E.164 format. In the DSU, the datagrams are segmented according to AAL 3/4. The cells generated in this way are transmitted to the ATM network via the virtual connection associated with the E.164 address. The typical application case is in connection with a CLS (connectionless server), over which a connectionless data service such as SMDS or CBDS (Connectionless Broadband Data Service) can be established.