

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 12 (1984)

Rubrik: Poster session 2: Construction management, health and safety

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. [Siehe Rechtliche Hinweise.](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. [Voir Informations légales.](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. [See Legal notice.](#)

Download PDF: 15.03.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



POSTER SESSION 2

Construction Management, Health and Safety

Gestion de la construction, prévention des accidents

Baumanagement, Arbeitssicherheit

Coordinator: R.S. Stilwell, Canada



Management of Two Major Turnkey Projects in Vienna

Martin FENZ

Dr.-Ing.
Rella Baugesellschaft
Wien, Austria

1) DISTRIBUTIONSZENTRUM

WIEN-HIRSCHSTETTEN

Warenverteilerzentrale für Österreich

Bauherr: Konsum Österreich, Wien

Baudaten: Umbauter Raum 1,100.000 m³

Verbaute Fläche 85.000 m²

Geschoßfläche 125.000 m²

Bauzeit: Oktober 1979 bis März 1981 = 18 Monate
=====

Ausführung: Generalunternehmer für Planung und
schlüsselfertige Einrichtung

2) WOHNPARC ALT-ERLAA

Wohnhausanlage mit drei Wohnblockreihen (A, B, C)

mit je 22 - 26 Wohngeschossen

Bauherr: "GESIBA" Gemeinn.Siedlungs-u.Bauges., Wien


	gesamt	Block C
Baudaten: Wohnungen	3.200	1.142
Wohnfläche	370.400 m ²	106.210 m ²
Umbauter Raum	1,480.000 m ³	520.150 m ³

Bauzeit: Block C als Generalunternehmer
Dezember 1981 bis Mai 1985 = 42 Monate
=====

Ausführung: Technische Geschäftsführung
im Rahmen einer Arbeitsgemeinschaft

MANAGEMENT OF TWO MAJOR TURN-KEY PROJECTS IN VIENNA


BUILDING PHASES

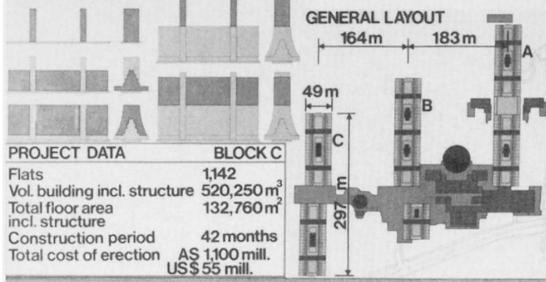


ALT ERLAA, BLOCK C - AERIAL VIEW



SECTION




PROGRESS PHOTOS

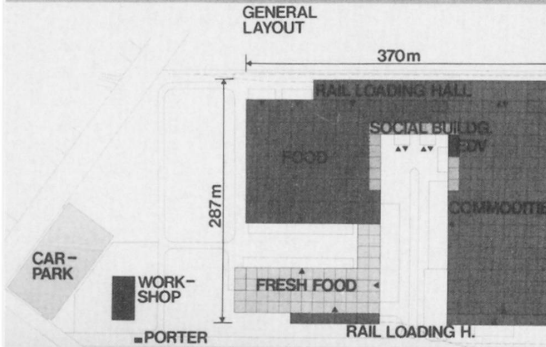

DZ HIRSCHSTETTEN - AERIAL VIEW



HIGH SHELVED WAREHOUSE



COLUMNS




PROJECT DATA



Vol. building incl. structure	1.1 mill. m ³
Total floor area incl. structure	125,000 m ²
construction period	15 months
Total cost of erection	AS 625 mill. US\$ 31.250 mill.

FLIESSFERTIGUNG IN DER REKONSTRUKTION

Alter der Wohnungsbausubstanz DDR 1983



Verhältnis Neubau : Reko. im Wohnungsbau der DDR



Reko-Taktstraße mit industriellem Gerüstbau
Teamarbeit VEB KBR und TH Leipzig
Foto L.B. Kopp

Industrialisierung der Bauprozesse schließt das Prinzip der Fließfertigung für Bauaufgaben mit Seriencharakter ein

Im Wohnungs-Neubau der DDR hat sich die Fließfertigung durchgesetzt

DDR-Wohnungsbau-Programm 1971-90: Lösung des Wohnungsproblems als soziale Frage

Anteil der Rekonstruktion wächst gegenüber dem Neubau

Reko- Objekte der Altersgruppe 1870-1918 dominieren

Somit technisch und ökonomisch Voraussetzungen für Serienproduktion gegeben

Industrialisierung der Rekonstruktionsprozesse mit Seriencharakter erfordert die Einrichtung von Taktstraßen

Im Bauwesen der DDR seit ca. 1980 Aufbau „technologischer Linien“ der Rekonstruktion



Minimale Unterbrechung der Bauwerksfunktion erfordert kontinuierliche Prozesse im Produktionsabschnitt

Kontinuierlicher Kapazitätseinsatz (Neubau): Beginnabstand der Teiltaktstraßen wird minimiert [Zyklogramm 1]


Kontinuität im Produktionsabschnitt (Rekonstruktion): Beginnabstand der Objekte wird minimiert [Zyklogramm 2]

Angleichen an rhythmischen Ablauf ist anzustreben. Damit können beide Kontinuitätsforderungen gleichzeitig annähernd erfüllt werden

Π_{KT} : Bauzeit/kont. Kapazit.
 D_{KO} : Bauzeit/kont. Obj.-Eins.
 D_{ij} : Taktdauer TTSj im Objekt i
 tP : technologische Pause
 kA : kritische Annäherung
 i, \dots, μ, \dots, m : Objekte
 j, \dots, v, \dots, n : Teiltaktstraßen



$$\Pi_{KT} = \sum_{j=1}^{n-1} \max_{i=1}^m \left(\sum_{i=1}^{\mu} D_{ij} + tP + \sum_{i=1}^{\mu-1} D_{i,j-1} \right) \sum_{i=1}^m D_{in}$$



$$D_{KO} = \sum_{i=1}^{m-1} \max_{j=1}^n \left(\sum_{j=1}^v D_{ij} + tP + \sum_{j=1}^{v-1} D_{i,j-1} \right) \sum_{j=1}^n D_{mj}$$

Programmpaket der TH Leipzig
 Ablaufplanung von Taktstraßen
 FFSTDOS: Stapelbetrieb, Quasigrafik
 FFBI DOS: Bildschirmdialog alphanum.
 FFZYKLO: Zyklogramm von Plotter



Load Variations in Bridge Falsework

D.W. QUINION

Chief Engineer
Tarmac Construction Limited
Wolverhampton, England

Construction Method

It was necessary to construct the concrete box girder section on a multitude of tubular steel members using a proprietary frame system because of the complex geometry of the bridge and the heavy loads to be carried. The four spans are unequal, the bridge has a reverse curve on plan and it is on a vertical curve. The east abutment is adjacent to a disused railway tunnel whilst the west abutment is on the top of a steeply inclined schist slope which has a river at its foot. In the more heavily loaded areas there were 26 lines of tubular supports, many of which were expected to receive safe maximum working loads.

The box construction, up to 6.3 m overall depth, was constructed in 10 m lengths of bottom slab, walls and then road deck. After the first span and a quarter had been concreted and had matured, it was post-tensioned using a stressing gap whilst concreting continued westwards. The gap was then filled. This procedure was followed for three spans.

Design of Falsework

The falsework supports were designed to withstand the dead load of the concrete work plus the imposed loadings during construction immediately above, together with the distributed wind load from wind speeds of 46 m per second with reduction factors. The wind load calculations based on the Code for permanent structures gave unrealistic answers and questioning led to evaluation of a more relevant design approach to wind loads on multi-tubular frameworks.

The bridge designer was involved in the assessment of likely vertical movements of the bridge as post tensioning was carried out. Whilst the first two operations were predicted to give small acceptable movements, the third span cantilever was predicted to rise by 55 mm and the rotation about the adjacent pier would increase the load in the Falsework east of it. The difficulty of assessing the magnitude of this increase and the risk to the safety of the Falsework for use here or elsewhere led to the use of load-measuring gauges to monitor the load history in the more critical area.

Load History

As concrete construction progressed the loads in the Falsework increased and approached the design values. As the concrete matured and particularly after a span was completed, the loads dropped in the Falsework as some 20% was transferred to the piers.



During post tensioning the third cantilever end rose by 76 mm and the adjacent span moved 14 mm downwards. The loads on the measured members rose by 25% from their previous values.

Subsequently, during removal of the Falsework the loads in some of the members which were the last to be fully relieved of load increased by a further 25%.

Summary

The measurements of the load history in the Falsework have shown the significance of post tensioning movements on supporting temporary works and the need to assess them. Monitoring of this kind is not only of value to future designs but enables safe control of Falsework to be demonstrated as the work proceeds.







LOAD VARIATIONS IN BRIDGE FALSEWORK

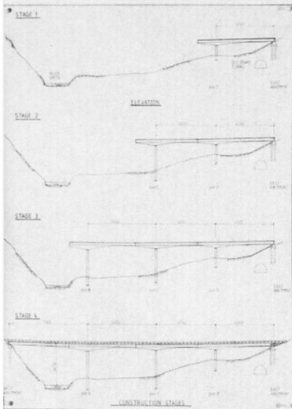

LOAD PREDICTIONS IN SUPPORTING FALSEWORK WERE BASED ON COMBINED VERTICAL IMPOSED AND DISTRIBUTED HORIZONTAL WIND LOADS USING A WIND SPEED OF 80 MPH. THIS EQUALLED FULL SCALE LOAD CAPACITY OF TUBULAR STEEL MEMBERS AT 300mm CENTRES NEAR THE PIERS. ASSUMPTIONS THAT THE STAGED POST TENSIONING WOULD NOT CAUSE APPRECIABLE VERTICAL MOVEMENTS OF COMPLETED SECTIONS WERE QUESTIONED. TO ENSURE SAFETY DURING CONSTRUCTION 21 LOAD MEASURING GAUGES WERE ATTACHED TO THE MOST CRITICAL AREA AND LOADS MEASURED DURING CONSTRUCTION AND TENSIONING. THEY WERE GROUPED TO GIVE CONFIDENCE IN THE RESULTS. THE VERTICAL MOVEMENTS OF THE BRIDGE DECK WERE ALSO RECORDED.

THE MEASURED VALUES SHOWED THAT WHILST THE PREDICTED VERTICAL MOVEMENTS OF THE CANTILEVER ENDS FOR STAGES 1 AND 2 WERE GENERALLY CORRECT THE UPWARD MOVEMENT DURING STAGE 3 WAS 50% HIGHER AT 76mm AND RESULTED IN AN INCREASE IN LOAD WHERE THE GAUGES HAD BEEN INSTALLED OF SOME 25%.

THE SLOW CONSTRUCTION OF THE REINFORCED CONCRETE IN STAGES ENABLED MATURITY TO OCCUR BEFORE STRESSING AND SOME OF THE DEAD WEIGHT TO BE TRANSFERRED TO PIER B. THUS THE MAXIMUM CONSTRUCTION LOAD WITH THIS SEQUENCE RESULTED IN ONLY 10% OVERLOAD IN THE FALSEWORK. DURING DISMANTLING THE CESSATION OF STAGED LOWERING OF SO MANY SCREW HEADS EVENTUALLY SHOWED UP AS INDUCING AN INCREASE IN LOAD ON THE RECORDED TUBES OF 25% WHEN COMPLETED THE BRIDGE RECOVERED ITS PROFILE TO THE DESIGN LINE.





Wheel and Axle Plant, Bangalore, India

C.R. ALIMCHANDANI

Chairman & Manag. Dir.
STUP Consultants Ltd
Bombay, India

P.J. JAGUS

Director
STUP Consultants Ltd
Bombay, India

J.S. PADALKAR

Princ. Consult.
STUP Consultants Ltd
Bombay, India

Sprawling over an area of 120 hectares, on the outskirts of Bangalore City, the Wheel & Axle Plant is a gigantic project built for the Railways. The complex is designed for the manufacture of 70,000 wheels and 23,000 axles per year for national consumption and export. The main wheel and axle plant covers an area of over 50,000 sq.m. and the ancillary buildings including maintenance shops, stores, metallurgical laboratory and staff housing occupy an area of about 35,000 sq.m. The technologies utilized, achieved speed and economy of construction for these visually arresting building.

Due to the large floor area of the buildings, maximum use of natural light and ventilation had to be achieved whilst minimising the cost of construction and maintenance.

Therefore, it was proposed that concrete structures, both prestressed and R.C.C. be adopted instead of the conventional structural steel. Since column free spaces of 30 m were required for the main wheel and axle plant and the linking assembly shop, precast, prestressed tied arch girders were utilized. These were spaced at 12 m intervals and capped by precast folded plates. For the electrical and mechanical engineering maintenance shops and store buildings, since the span requirement was only 12 m, cast-in-situ conoidal shells, 6.5 cm thick, were used.

Both these structural forms were optimized to achieve maximum use of natural light and ventilation. This was done by correlating the height of tied arch girders, glazing across tied arch girders, height of conoidal shell elements, spacing of shells, glazing area across shells and reflecting interior surfaces of shells. Thus, a pleasant interior environment and saving in energy was achieved without compromising structural economy. The design of the plant also took into consideration the possibility of concrete fatigue due to high ambient temperature generated in the melting shop.

The girders were tested at a load of 240 t, which was 1.25 times their service load. As the rise of the girder at its central point was 5 m, and the load was heavy, the girders were tested horizontally in pairs, with two restraining frames at ends. Jacks with a common power source were used to apply the loads at 11 node points simulating the actual loading conditions.


The project represents an optimization of functional requirements, economy of construction and maintenance, aesthetic appeal and conservation of energy, achieved by a complete familiarity with design and construction technologies and by the innovative adaptation of these technologies to the environment.

WHEEL & AXLE PLANT, BANGALORE, INDIA






One of the largest industrial plants in South Asia. Producing 70,000 wheels and 23,000 axles for the railways. Total area 85,000 sq. m. including main building 51,000 sq. m. and ancillary buildings 35,000 sq.m. Functional requirements and aesthetic appeal achieved by use of precast prestressed tied arch girders, precast folded plate elements, and conoidal shells creating natural lighting and conservation of energy. Design takes into consideration structural economy and concrete fatigue due to high ambient temperatures.

1 EME Maintenance shop. Metallurgical Laboratory in foreground.



2 Interior view of EME Maintenance Shop with its natural lighting and pleasant environment.

3 Mini precasting factory on site.

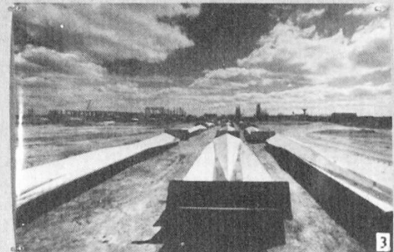

4 Lifting 40 T precast prestressed tied arch girder 30 M span.
 5 Tied-arch girders erected and in position
 6 6 cm thick folded plate element 12 m.
 7 Folded plate elements in position

Bhima Aqueduct, Maharashtra, India**C.R. ALIMCHANDANI**

Chairman & Manag. Dir.
STUP Consultants Ltd
Bombay, India

P.J. JAGUS

Director
STUP Consultants Ltd
Bombay, India

J.S. PADALKAR

Princ. Consult
STUP Consultants Ltd
Bombay, India

Bhima Aqueduct is part of a major irrigation scheme comprising a gravity dam, reservoir, canals and distributories. The 947 m long aqueduct is designed to carry 42.5 cumecs of water across Bhima, a perennial river in the State of Maharashtra, India.

To maximise hydraulic and structural efficiency, a truncated circular cross section was chosen over the conventional rectangular section. This choice resulted in the following advantages:

- The hydraulic mean radius of the section was increased to 1.43 m compared to 1.0 m in the original design.
- This resulted in a reduced waterway of 13.80 m^2 compared to 18.0 m^2 in the original design, the discharge and slope remaining the same.
- The reduced waterway section decreased the water load by as much as 23 %.
- Transversal effects were reduced mainly to membrane forces easily taken care of by transverse prestressing.

The spans were made continuous over 4 or 5 supports achieving substantial reductions in design moments.


The efficient cross-section, continuity of the structure and use of longitudinal and circumferential prestressing resulted in a reduction of the concrete section by as much as 55 %. This led to a reduction in dead load on the substructure which enabled use of tapering hollow R.C.C. piers filled with plum concrete, instead of solid concrete piers.

The use of scaffolding was not desirable due to the presence of running water and the height of some of the piers which rise to over 40 m. Therefore, the cantilever construction method using precast matchcast voussoirs was applied. The voussoirs in 3.26 m length were produced in a casting yard located at site. Specially designed shuttering was used consisting of trolleys, external side shuttering and internal shuttering. To facilitate early release of voussoirs from the casting yard, 50 % of the transverse prestressing force was applied at the end of 3 days. Special equipment was designed to handle the voussoirs in the casting yard. After curing, the voussoirs are taken to the site and lifted with specially designed cantilever lifting equipment which has cradles to facilitate application of epoxy glue and prestressing force to the aqueduct.

A steel gangway is utilized to shift the cantilever lifting equipment from a completed span to the next span to save the time taken in dismantling shifting and subsequently reassembling the equipment on the next pier. The key segment of 1.9 m length is cast-in-situ for which the shuttering is supported from the already constructed arms of the tube.

This project serves as an example of the application of advanced technology, suitably adapted to the environment, to create an efficient, economical and aesthetically pleasing structure.


BHIMA AQUEDUCT, MAHARASHTRA, INDIA

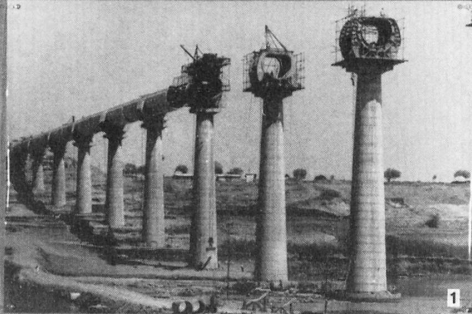


42.5 cumecs; 947 m long, 41.5 m continuous spans, 3.75 m roadway. Truncated circular cross section 4.8 m dia. Constructed by cantilever technique using epoxy glued precast matchcast voussoirs prestressed longitudinally and circumferentially.

Efficient, economic aesthetic structure integral with environment achieved by appropriate design and specially devised construction techniques and equipments.


- 1 Piers with saddles and external diaphragms
 —Cast in situ segment on pier-second from right
 —Cantilever lifting equipment.



2 Sequence of establishing continuity




3 Salient dimensions, cross section and longitudinal elevation




4 Shuttering for Voussoirs Voussoir partially prestressed to release trolley




5 Specially designed equipment for handling voussoirs




6 Stacked Voussoirs



7 Cantilever lifting equipment cradles and walkway



8 External diaphragms at supports. Walkway to transport material



9 Key Joint concreted in situ. Prestressing of continuity cables.

Leere Seite
Blank page
Page vide