

**Zeitschrift:** IABSE congress report = Rapport du congrès AIPC = IVBH  
Kongressbericht

**Band:** 14 (1992)

**Artikel:** Structural schemes for lateral load resistance

**Autor:** Shanthakumar, A.R.

**DOI:** <https://doi.org/10.5169/seals-853173>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. [Siehe Rechtliche Hinweise.](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. [Voir Informations légales.](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. [See Legal notice.](#)

**Download PDF:** 07.10.2024

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## Structural Schemes for Lateral Load Resistance

Systèmes structuraux pour résister à des charges latérales

Tragsysteme für horizontale Einwirkungen

**A.R. SANTHAKUMAR**

Prof.  
Anna University  
Madras, India

### Preamble

Majority of institutional buildings in India and New Zealand are moderately tall (6 to 10 stories). The resistance to lateral load in them are provided by rigid jointed frames, shear walls, prefabricated shear walls or frames infilled with bricks. This paper summarises the findings of experimental investigation of these systems subjected to lateral cyclic loads. The Systems considered are shown in Figure 1.

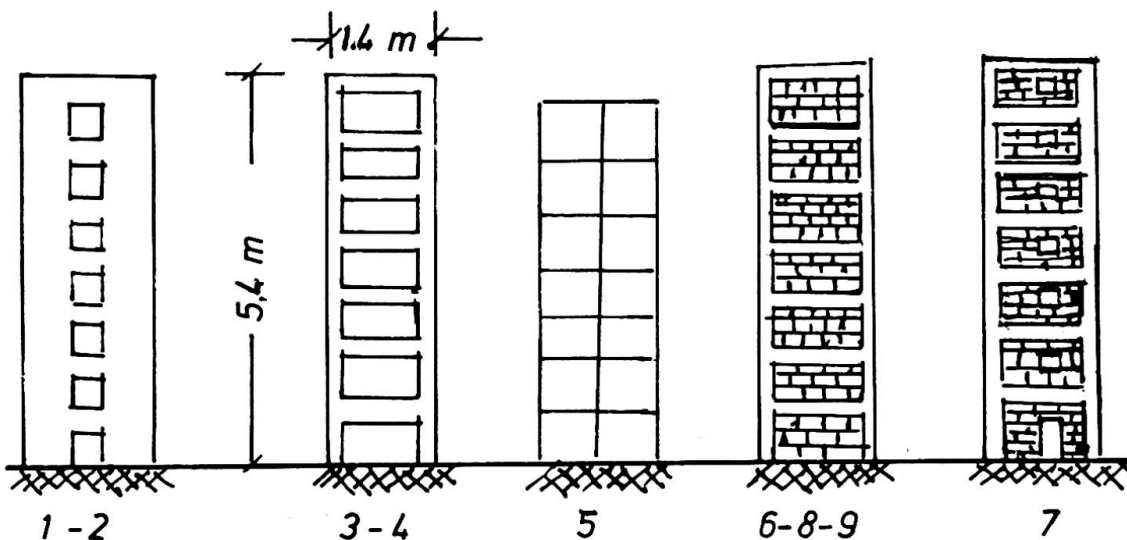


Fig.1 Systems Considered

### Philosophy

The system efficiencies were studied with respect to

- \* Strength
- \* Stiffness
- \* Ductility
- \* Preferred sequence of failure and damage control.


**Efficiency**

The efficiency of the system is worked out using the equation

$$\eta = \frac{\mu P_u}{\mu_f P_{us}} \times 100$$

Where

- $\eta$  = Efficiency of the system
- $\mu$  = Ductility of the system
- $P_u$  = Ultimate load of the system
- $\mu_f$  = Ductility of the rigid jointed frame
- $P_{us}$  = Ultimate load capacity of shear wall

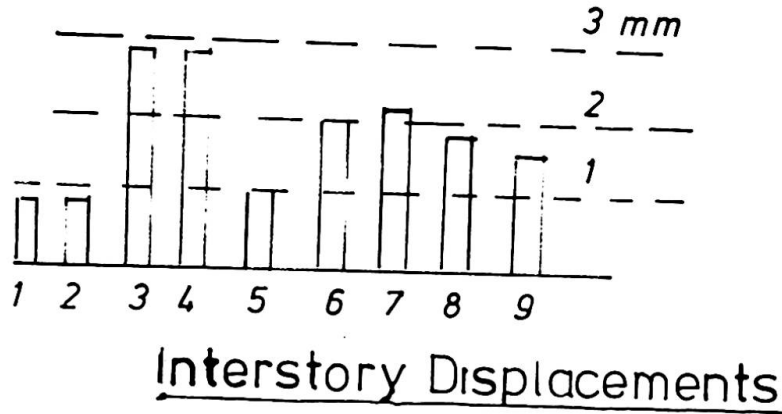**Results**

**Fig.2** Results of tests on quarter full size seven storey models

**Conclusion**

The table summarises the relative efficiency of the systems.

System Number	Cumulative Ductility	Ultimate Load (P <sub>u</sub> ) kN	Efficiency %
1	50	237	29.6
2	85	300	63.7
3	90	72	16.2
4	100	70	17.5
5	80	312	62.4
6	12	147	4.4
7	18	131	5.9
8	20	97	4.8
9	16	161	6.4

Leere Seite  
Blank page  
Page vide