

**Zeitschrift:** IABSE congress report = Rapport du congrès AIPC = IVBH  
Kongressbericht

**Band:** 12 (1984)

**Artikel:** Optimum design of double-layer space girds

**Autor:** Agerskov, Henning

**DOI:** <https://doi.org/10.5169/seals-12290>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. [Siehe Rechtliche Hinweise.](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. [Voir Informations légales.](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. [See Legal notice.](#)

**Download PDF:** 15.03.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## Optimum Design of Double-Layer Space Grids

**Henning AGERSKOV**

Assoc. Prof. of Struct. Eng.  
Technical University of Denmark  
Lyngby, Denmark

In recent years extensive and increasing use has been made of space trusses, especially in the form of double-layer space grids. These types of structures have in many cases been able to compete with more traditional constructions. The main areas of application have been sports halls, swimming pools, exhibition buildings, churches, shopping centres, hangars, factory buildings, etc., where the space grid is used as roof construction.

In the design, almost unlimited possibilities exist in practice for the choice of geometry of space trusses. This forms the background for a research project, in which the optimum design of double-layer space grids has been investigated. As a first part of the investigation, a study covering what has, until recently, been obtained as regards optimization of double-layer space grids was carried out. With the results of this investigation as a starting point, various geometrical designs were studied in detail to determine the optimum design. Both square and rectangular grids have been investigated, under the assumption of either simple supports along the entire edge or column supports at the corners.

In determination of the optimum design, an ordinary mathematical optimization based on a minimum of material consumption, was found to be of little practical interest. The present investigation is based on assumptions concerning nodes, members, supports, loading, etc., which make the results realistic to a practical design. To determine the optimum de-

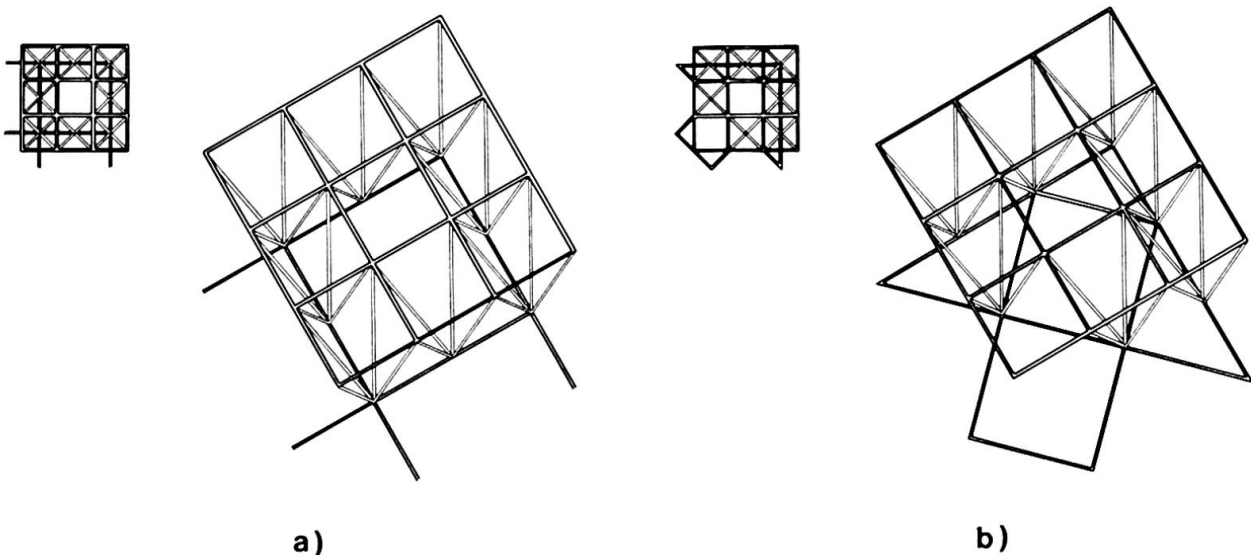


Fig. 1. Space grid systems, which will in general result in good overall economy.



sign, both the material consumption, the number of nodes, and the number of members in the structure have to be considered, while an optimum design based only on a minimum of material will rarely, if ever, be an economical optimum for a double-layer space grid.

On the basis of the results obtained in the investigation, guidelines for the structural engineer to obtain an optimum design, have been worked out. Guidelines are given for choice of overall geometry of simply supported and corner-supported square and rectangular space grids.

### RECOMMENDATIONS

The following general recommendations concerning optimum design of double-layer space grids can be made:

1. The member density must be small. In addition to giving a small material consumption, this leads to a grid with relatively few nodal points and thus least possible production costs for nodes, erection expenses, etc.
2. The system should be chosen so that the space grid is built of relatively long tension members and relatively short compression members.
3. For rectangular, relatively long space grids, optimum design is obtained with systems where the load is mainly carried across the short span. Systems where the members in both top and bottom layer grids are parallel to the edges will generally result in the least material consumption.
4. If both the material consumption and the number of nodes and number of members are considered, the space grid systems shown in Fig. 1 a and b will, generally speaking, result in good overall economy. This could be concluded from investigations on both square and rectangular double-layer space grids, simply supported along the entire edge or column-supported at the corners.

### REFERENCES

1. Agerskov, H., and Gudjonsson, H., "Optimal udformning af rumgitterkonstruktioner", Proceedings of the Scandinavian Conference on Steel Research, Copenhagen, Denmark, Aug., 1979, pp. VI. 5.1-13.
2. Agerskov, H., "Optimum Design of Double-Layer Space Trusses", Report, Dept. of Civil-Structural Engineering, Portland State University, Portland, Or., U.S.A., 1981.
3. Agerskov, H., and Bjørnbak-Hansen, J., "Optimum Design of Corner-Supported Double-Layer Space Trusses", Report No. R 177, Dept. of Structural Engineering, Technical University of Denmark, Lyngby, Denmark, 1983.
4. Agerskov, H., "Optimum Design of Double-Layer Space Grids", Dept. of Structural Engineering, Technical University of Denmark, Lyngby, Denmark, Sept., 1984, 21 pp.