

Zeitschrift: IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht

Band: 13 (1988)

Artikel: Long span composite bridges in Nordic conditions

Autor: Jutila, Aarne / Rantakokko, Timo

DOI: <https://doi.org/10.5169/seals-13164>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. [Siehe Rechtliche Hinweise.](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. [Voir Informations légales.](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. [See Legal notice.](#)

Download PDF: 17.05.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



Long Span Composite Bridges in Nordic Conditions

Ponts mixtes de grandes portées dans les pays nordiques

Weitgespannte Verbundbrücken unter nordischen Bedingungen

Aarne JUTILA

Professor
Helsinki University of Technology
Espoo, Finland

Timo RANTAKOKKO


Civil Eng.
Juola & Rantakokko
Oulu, Finland



NORDIC LONG SPAN STEEL-CONCRETE COMPOSITE BRIDGES.


The use of steel-concrete composite bridges has increased rapidly in the years since 1976 in Finland. This form of construction is particularly suited to the prevailing harsh winter conditions, as it makes it possible to prefabricate the steel main beams in the workshop. These can then be erected on site, normally during the winter when rivers are frozen. The concrete deck can then be completed during more favourable weather. This form of winter construction sets extremely high demands on dimensional accuracy and material quality. In particular, this is especially true of the steel used, which must retain high toughness and weldability in temperatures as low as -40°C . Due to the development, at the end of the 1970's, of automatic beam and stud welding techniques and of special steels such as CORTEN B and RAEX 385 (Fe 355 E) by Rautaruukki Oy it has

been possible to produce this kind of composite waterway bridge competitively, to cover the span range of 25 m – 120 m for multi span, and, in type series form, from 16 – 38 m for single span bridges.

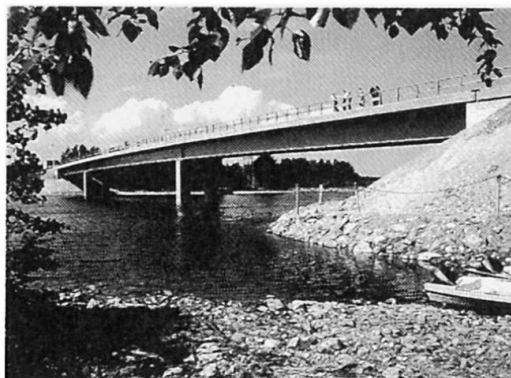


JYVÄSJÄRVI BRIDGE.

This bridge, the largest single bridge contract awarded in Finland, will be the longest steel-concrete composite bridge in the country. Its design was selected in a competition in which external appearance, in addition to technical and financial aspects, was considered. The deck, which has a horizontal clearance of 15.5 m including a 7 m traffic lane, is carried on two main steel beams which are angled in the inner opening. The beam height varies from 2.5 – 4.65 m. The main beams are connected to each other by cross-trusses and by horizontal trusses between the beams. The broad reinforced deck slab, which is supported by the beams, is prestressed



Cross-section of composite beam intermediate support area showing only the reinforcing steel.

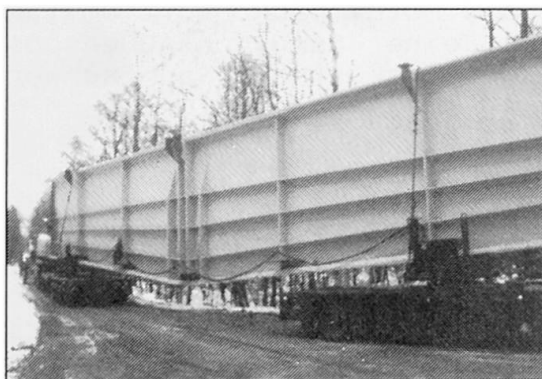

Main Beam Sections prior to installation.




Typical series type bridge.

in the lateral direction. A total of 1510 tonnes of RAEX 385 special steel is used in the superstructure.

The bridge is founded on a very soft silty clay, which demands piles to as deep as 50 m, where they are bedded in a 5 m moraine layer. The piles used are steel tube piles with a diameter of 1220 mm and the six intermediate support pillars need a total of 2200 m of these.

Fabrication of the steel structures is currently underway and they will be launched from both banks by the incremental launching method, to be joined at the middle of the central span.

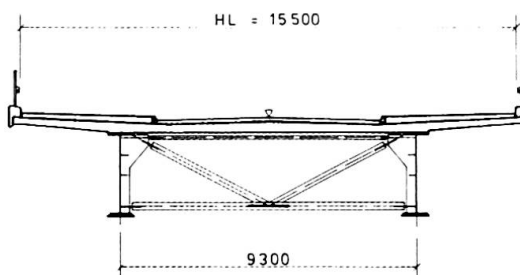

Jyväskylä bridge. Cross-section of deck structure. Due to lateral prestressing it has been possible to use only two main beams.

TECHNICAL DETAILS

Client: Jyväskylä Town Design: Juola & Rantakokko Ky
Main Contractor: Insinööritoimisto Oy
Steel Fabrication: Rautaruukki Oy
Span Width: $50 + 67 + 78 + 90 + 78 + 67 + 50 = 480$ m
Clearance: 10 – 14 m
Quantities: Total steel 2860 tonnes, of which 780 tonnes piling and 1510 tonnes RAEX 385 superstructure.
Concrete – 4850 cu.m.