

**Zeitschrift:** IABSE structures = Constructions AIPC = IVBH Bauwerke  
**Band:** 1 (1977)  
**Heft:** C-1: Standard bridges as highway overcrossings  
  
**Artikel:** Standard bridges as highway overcrossings (United Kingdom)  
**Autor:** Sriskandan, K.  
**DOI:** <https://doi.org/10.5169/seals-14508>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

**Download PDF:** 06.07.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**



## 7. Standard Bridges as Highway Overcrossings (United Kingdom)

*Owner: Department of Transport, United Kingdom*

### *Dimensions:*

*clear lengths (4 span bridges) excluding side spans:*  
*from 24.20 and 35.70 m*  
*bridge widths: from 9.9 and 11.70 m and 9.9 and 11.70 m*  
*angle between axes highway/overcrossing: 65° to 90°*  
*maximum grade: 4 o/o*

### *Quantities of materials used pro m<sup>2</sup> of bridge:*

*0.425 m<sup>3</sup> concrete for superstructure 4 span bridge*  
*(10 m+17.5 m+17.5 m+10 m) and width of 11.70 m*  
*0.625 m<sup>3</sup> concrete for substructure (usual foundation*  
*conditions)*  
*179 kg steel*  
*11.1 kg steel for prestressing*

### *Work's duration:*

*Date when available for use: 1977*

A Department of Transport project for the design of standard bridges is just nearing completion. The aim was to prepare designs for commonly occurring bridges. From surveys carried out it was decided to produce designs to carry roads with carriageways of 5.5 m and 7.3 m (each with 2 x 2 verges) over dual two lane trunk roads and dual three lane motorways. The designs cover the following ranges:

- Skew angle of 0° – 25°
- Gradients from 0 o/o – 5 o/o
- Crossfall from 0 o/o – 3.3 o/o
- Headroom from 5.1 m – 6.3 m
- Overwidening bridge to cater for radius from  $\infty$  – 740 m on side road
- Overspanning bridge to cater for radius from  $\infty$  – 1840 m on main side
- Foundations to be designed for a permissible bearing pressure of 200 and 300 kN/m<sup>2</sup>

Two span and four span designs are offered in five deck types of which only the RC slab deck is of continuous construction. The deck types are:

- Reinforced concrete slab deck (Fig 1) incorporating voids in the centre spans of the 4 span scheme, for dual 3 motorways.
- Prestressed concrete inverted Tee beams (Fig 2) with insitu concrete infill – over dual 2 lane trunk roads only.
- Prestressed concrete M beams (Fig 3) at 1.5 m centres acting compositely with an insitu concrete deck slab.
- Prestressed concrete U beams (Fig 4) at 2.5 m centres acting compositely with an insitu concrete deck slab.
- Rolled steel beams (Fig 5) at 2.5 m centres acting compositely with an insitu concrete deck slab.

The simple spans of the decks with prefabricated beams are linked together so that all the expansion takes place at the two ends of the bridge. There are no 'fixed' bearings and the longitudinal forces are shared between the intermediate supports. Service bays are provided under each verge.

The standard bridge package includes reinforced concrete abutments and bank seats which are interchangeable for all 5 deck types. The standard pier design is also interchangeable for deck types b, c, d and e while deck type a has individual circular columns. The photographs show artists impression of such standard bridges.



Fig 6 a 2 span overbridge of U beam construction



Fig 7 a 4 span overbridge of M beam construction

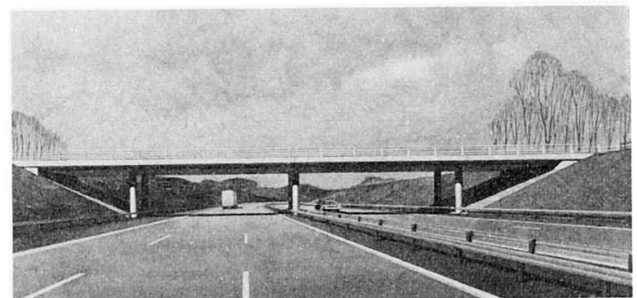


Fig 8 a 4 span overbridge of Reinforced concrete slab deck with individual columns

Standard drawings have been prepared and a user manual describes how to complete the drawings for a given bridge situation. The designs have been prepared for the Department of Transport by the following:

W S Atkins & Partners in association with the Department's South Eastern Road Construction Unit,  
 EWH Gifford & Partners in association with the Department's North Eastern Road Construction Unit,  
 G Maunsell & Partners in association with the Department's Eastern Road Construction Unit,  
 Constructional Steelwork Research and Development Organisation.

(K. Sriskandan)

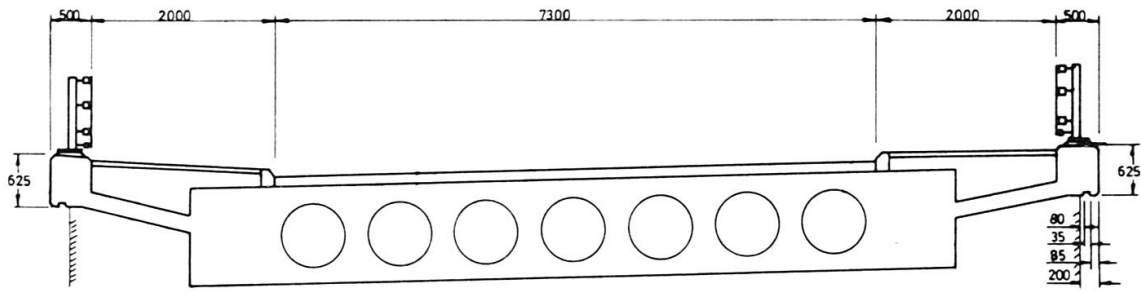


Fig 1 Reinforced Concrete Voids Slab

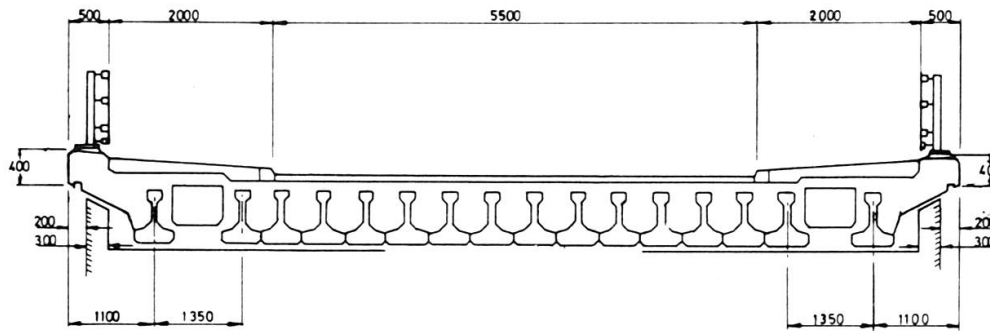


Fig 2 Pre-Stressed Concrete Inverted T-beam with in-situ concrete in-fill

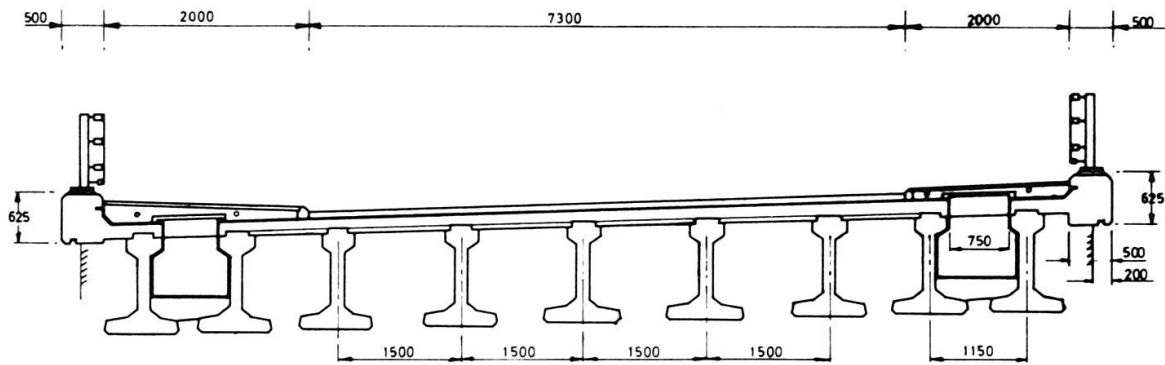


Fig 3 M-beams with composite in-situ slab

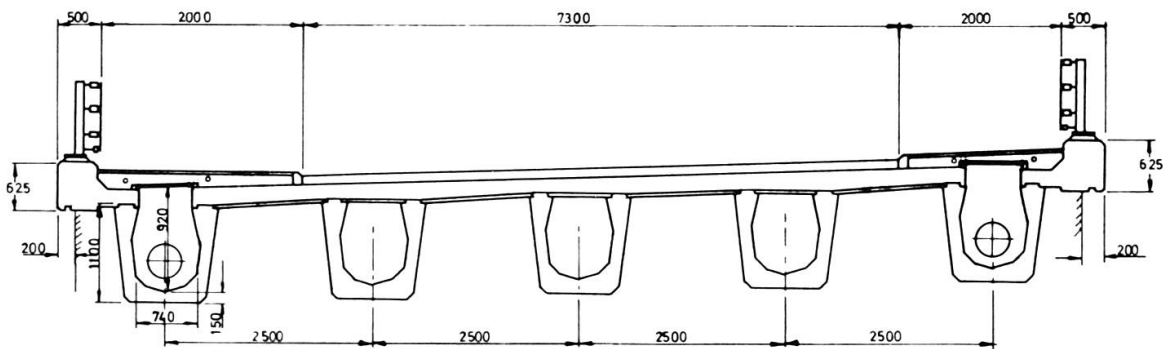


Fig 4 P.C. U-beams with in-situ composite slab

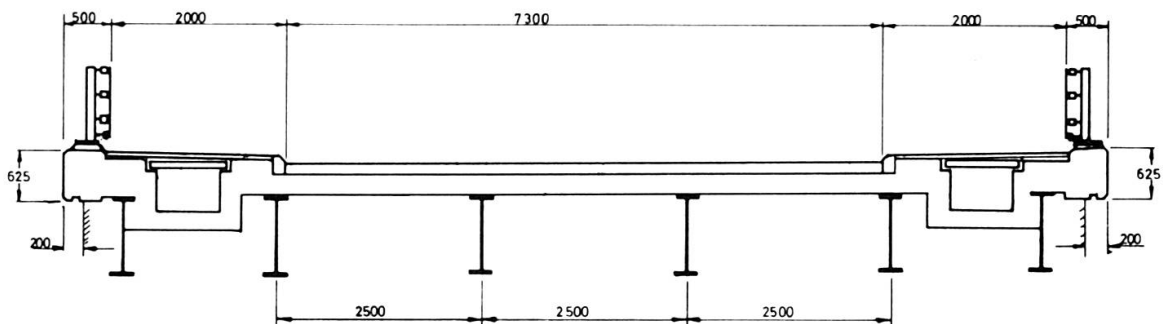


Fig 5 Rolled Steel Beam with composite R C Slab