

Zeitschrift: IABSE structures = Constructions AIPC = IVBH Bauwerke
Band: 3 (1979)
Heft: C-11: Bridges II

Artikel: Ähtärinsalmi bridge
Autor: [s.n.]
DOI: <https://doi.org/10.5169/seals-15872>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 19.07.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

BUILDER:
The National Board of Public Roads and Waterways,
Helsinki, Finland

CONTRACTOR:
NPRW, Vaasa District
DESIGN CONTROL:
NPRW, Design Office
Erkki Ioksela, Civ.eng.,
Chief of Control Office

DESIGNER:
Suunnittelukortes Oy
Consulting Engineers
Pikisaarentie 13
90100 OULU 10, Finland
Helge Roos, Chief eng.,
Chief of Bridge Construction Office
Bridge Design Office;
Yrjo Punnonen, Chief eng.,
Chief of Design Office




BRIDGING CONDITIONS IN FINLAND

- The most characteristic feature of the Finnish geography is the multitude of shallow lakes and the natural beauty of the waters. The area of our waters is 9.3 % of the whole surface of 337 000 km².
- We have 75 000 km of public roads and 9000 bridges in them.
- The total of our railway's 9000 km and 1 600 railway bridges.
- An average of 200...300 bridges are built in Finland annually.
- The average span of our bridges is 15 m.
- According to building materials the bridges can be divided as follows:
 - concrete bridges 80 %
 - steel bridges 15 %
 - wooden bridges 13 %
- Conditions for founding are usually good. Most bridges have ground foundations but also different types of pile foundations are commonly used.
- The depth of foundation is often decided on the basis of the depth of frost.
- The annual mean temperature of the country is +2°C, the average day temperatures (July, January) varying from +22°C to -18°C.
- The temperatures set their requirements on building materials.
- The steel used in bridges must have high impact strength. The general requirement is 27 J at -30°C.
- Melting and freezing speeds up erosion of concrete.
- Concreting is mainly carried out during the cold season.
- Snow and the scarcity of daylight hours also add further costs.

ÄHTÄRINSALMI BRIDGE FINLAND

SUUNNITTELUKORTES OY THE NATIONAL BOARD OF PUBLIC ROADS AND WATERWAYS OF FINLAND

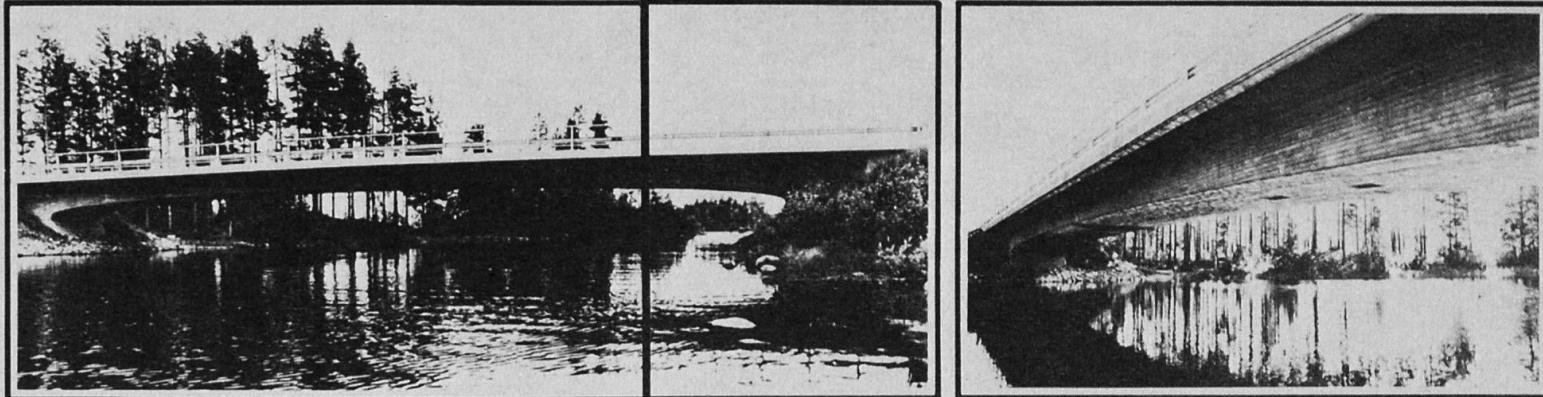

ÄHTÄRINSALMI BRIDGE

- Technical solution in beautiful landscape
- The type of bridge is post-tensioned frame bridge
 - The water landscape is preserved as intact as possible
 - Structure of the bridge:
 - free span 40 m
 - height of structure 2.0...1.2 m
 - two pier legs and deck post-tensioned
 - stainless steel drop joint
 - foudning on ground
 - Slim deck makes the overall structure flexible
 - Variations of temperature (+ 20°C — -30°C) are controllable as the frame is flexible, even though the pier legs are short
 - The angle of the pier legs makes the joint force resultant very small, as horizontal force is only created by varying loads
 - Concrete 360 m³
 - Tensioned steel 12 000 kg
 - Reinforcement steel 33 500 kg



PROBLEMS AND SPECIAL MEASURES CAUSED BY WINTER

Mean temperatures are in Finland below 0°C for about half the year during several months they vary from -0°C to -30°C. This period coincides with the building period of the bridge but it is by no means adherence to the realization of most common technical constructions. An example of this is the Ähtärinsalmi post-tensioned frame bridge which was carried out as a winter project.

As a rule concreting is done in temperatures as low as -15°C; in temperatures lower than this concreting is avoided economic reasons. Concreting is technically possible even in temperatures of -30°C, nor is it unique to make bridges in Lapland in -20°C.

Low temperatures are only a special measure during construction time but they also cause special situations in requirements, the foremost of which is that the materials are to sustain very low and greatly varying temperatures. Frost penetrations even under the foundation level are to be eliminated.

THE MOST IMPORTANT MEASURES IN WINTER CONCRETING

- all concreting in below +5°C temperatures is considered winter concreting
- heating of the materials of mass concrete
- protection of mass concrete from cold during transport
- protection of mass concrete in formwork and heating as a rule when temperatures fall below -1°C
- constant watch over temperatures of concrete, especially in places where freezing would be fatal

The duration of below 0°C mean temperatures in different parts of Finland is shown on enclosed map.

PREVENTION OF FROST DAMAGES

- foudning in frostproof depth
- frostng ground to be replaced down to frostproof depth
- use of insulation

Frostproof depths in different parts of the country are shown on enclosed map.

