

Zeitschrift: IABSE structures = Constructions AIPC = IVBH Bauwerke
Band: 3 (1979)
Heft: C-9: Recent structures

Artikel: The press centre building in Bratislava (CSSR)
Autor: Kozak, J.
DOI: <https://doi.org/10.5169/seals-15809>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 16.07.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



5. The Press Centre Building in Bratislava (CSSR)

Owner: PRAVDA, Bratislava

Designer: LIGNOPROJEKT, VITKOVICE, Bratislava

*Contractors: HYDROSTAV, VITKOVICE, SES Tlmace,
HUTNI MONTAZE*

Year of begin of construction: 1977

The ground plan size of the office building is 22,1 x 72,0 m, its height is 103 m corresponding to 27 storeys. Its structural system consists of a steel skeleton combined with reinforced concrete stiffening vertical wall structures (Fig. 1). In the transverse direction there are four shear walls spaced 24 m all over the width of the building. These walls divide the building into three sections. The elevation walls have the character of a pair of walls connected by lintels, whereas the internal walls have the form of vertical pierced wall (Fig. 2). The longitudinal walls in the middle section are also designed as walls with holes and are connected to the internal transverse so that they constitute an internal core together. The relatively considerable wall thicknesses are due to large vertical loads and to technological reasons. The walls include rigid steel elements (steel structure) to be in the final stage all embedded in concrete as parts of steel reinforcement.

The horizontal structures are in steel with steel sheet panels. They are connected and in erection stage carried by steel elements in the vertical walls. In the longitudinal facades are one storey high Vierendeel beams of 3 x 24 m span (Fig. 3). The material used for these beams is steel of type COR-TEN, in CSSR produced under mark ATMOFIX. The internal beams are of 2 x 12 m span and of 60 cm height. Also the jalousies in the site facades are in ATMOFIX.

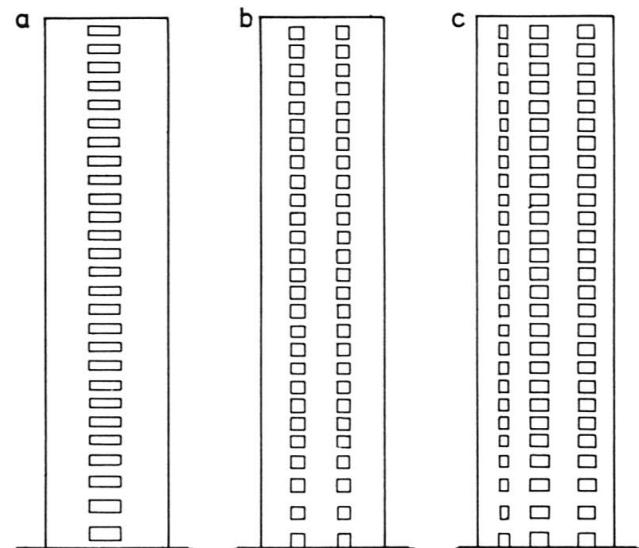


Fig. 2 Scheme of the shear walls:
 a) elevation transverse
 b) internal transverse
 c) longitudinal walls

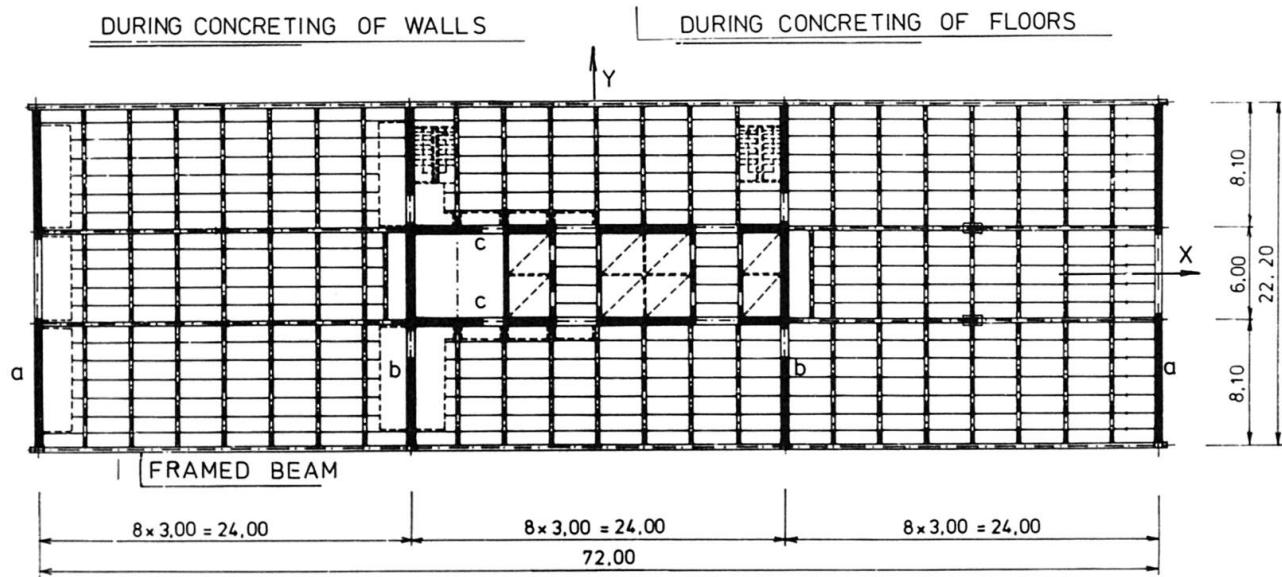


Fig. 1 Floor with shear walls

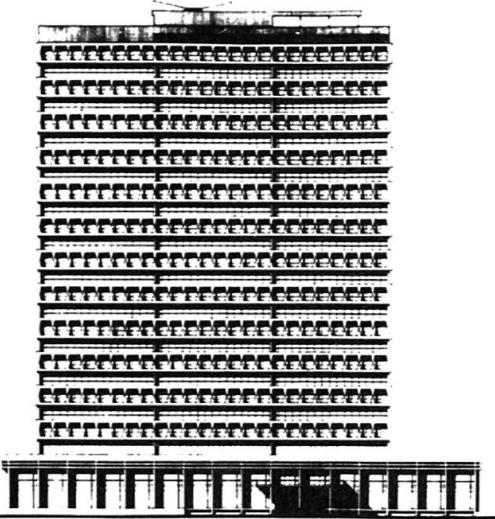


Fig. 3 Longitudinal facade (Project)
Vierendeel beams made of ATMOFIX-steel

The structural spatial system has been analyzed as the structure of the bar character with battened cross section, composed of all vertical perforated walls. The constancy of cross section is secured by the stiff floor structures in the function of transversal diaphragms.

The simple steel structure of vertical walls is most important during construction and they are designed to be able to secure the spatial stability of 6 storeys height without concreting. The bearing of horizontal structures on vertical ones is statically clear, designed as connection steel on steel without tolerance problem.

The steel structures of the vertical walls are assembled on the terrain in a vertical skeleton of 22,0 m width and of two storeys height, completed by reinforcement bars and after that as a whole elevated into the final position. The construction works are to follow the flow technology pattern i.e. after assembly of two to six storeys the next steps are the concreting of walls and pouring of a concrete floor slab on top of the steel sheet panels (Fig. 4).

(J. Kozak)

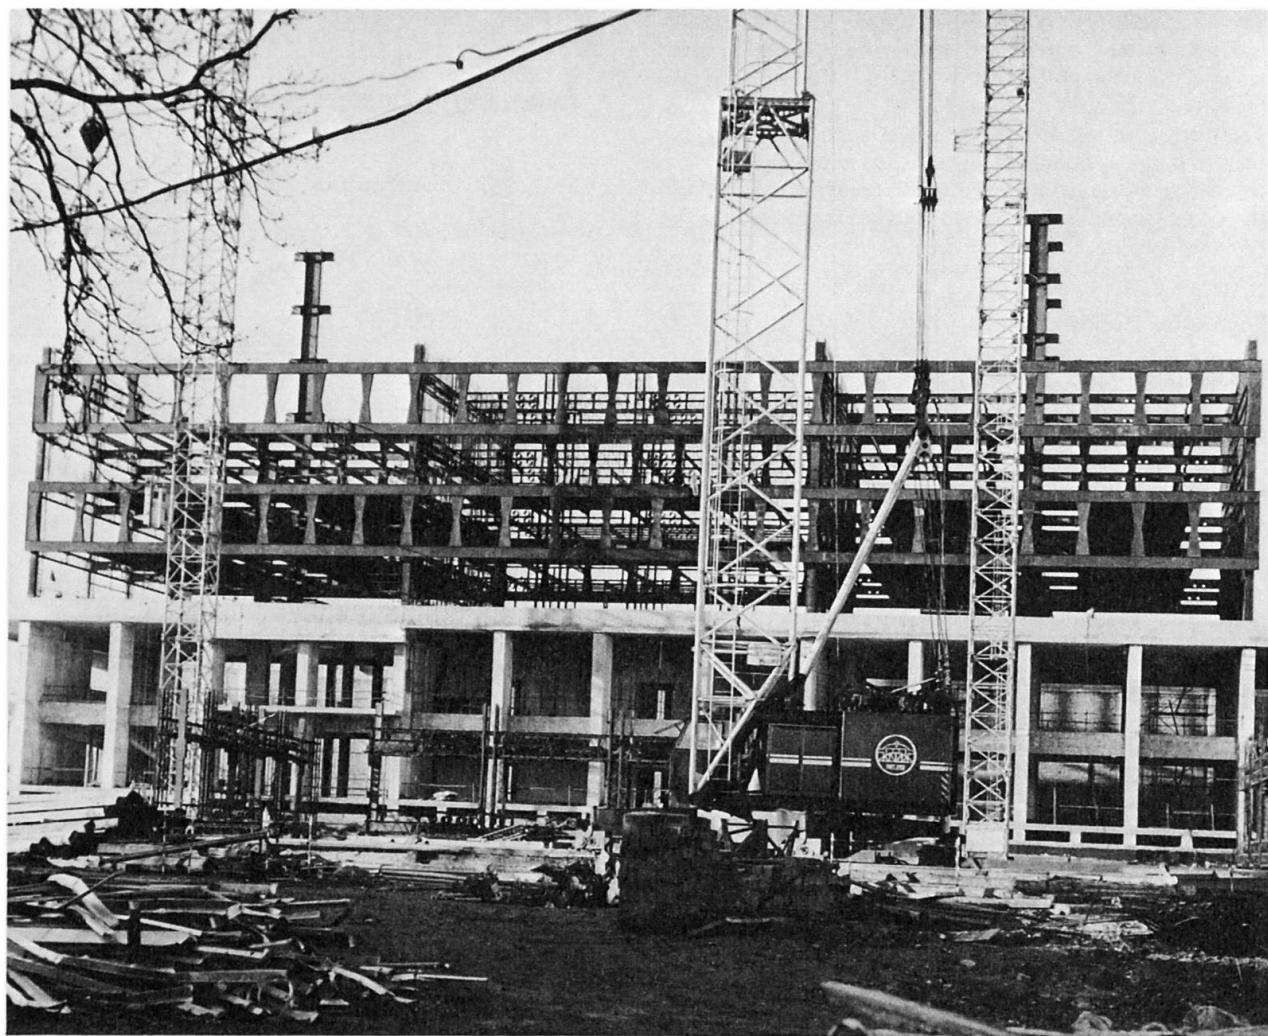


Fig. 4 Building during construction