

Objektyp: **Advertising**

Zeitschrift: **IABSE structures = Constructions AIPC = IVBH Bauwerke**

Band (Jahr): **3 (1979)**

Heft C-9: **Recent structures**

PDF erstellt am: **22.07.2024**

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern. Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden. Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

### **Haftungsausschluss**

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.



# Whenever Structural Safety is the Point... Kern Precision Instruments are the Right Choice


For measuring distances up to 2500 m:

## Mekometer ME 3000

Electro-optical Precision Distance Meter with the extremely high accuracy of  $\pm (0.2 \text{ mm} + 1 \text{ ppm})$  and a range of 2.5 km. Digital distance display to 0.1 mm.

Universal application: structural deformation measurements, large area slip and displacement measurements, precision layout work and fundamental surveying.

The Mekometer used for dam control measurements

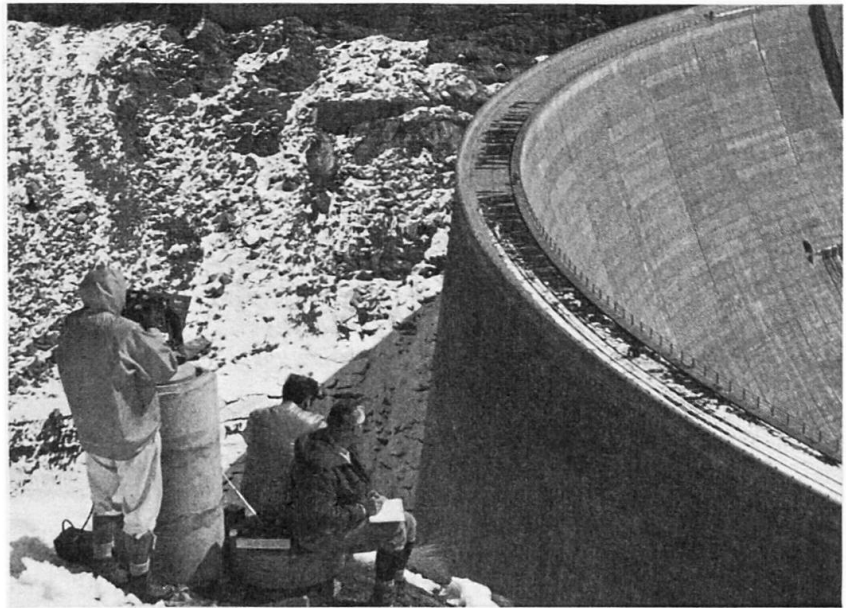

For measuring length variations within a distance range of 50 m:

## Distometer ISETH

Precision instrument for accurate determination of length variations by means of Invar wires. Measuring accuracy  $\pm 1 \text{ ppm}$ ; length of the Invar wire 1—50 m; measuring range for length variations 100 mm.

Special advantages: lengths of any inclination including vertical may be measured; simple layout of the measuring arrangement.

Application: structural deformation measurements.

The Distometer ISETH used for tunnel wall deformation measurement

Kern & Co. Ltd.  
Mechanical, Optical and  
Electronic Precision Instrument  
CH - 5001 Aarau, Switzerland  
Telex 68 106

Please send me your detailed documentation on:


- Mekometer ME 3000  
 Distometer ISETH

Name: \_\_\_\_\_

Occupation: \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

The background of the advertisement features two hands wearing dark, textured work gloves. The hands are positioned on either side of the central text, with the index fingers pointing upwards. The lighting creates strong shadows, emphasizing the texture of the gloves and the form of the hands.

# ARBED ROLL TAILOR-MADE BEAMS

More or less is hardly precise. If you're talking construction, you're talking precision. In any steel-frame structure, the only ideal beam is the one that matches the dimensional and stress requirements of the laws of statics. No more, no less. And if standard beams can't meet these demands, other beams have to be produced: tailor-made beams, developed and manufactured by ARBED for precision building.

Rolled by ARBED on modern universal mills, these beams complete one of the most comprehensive rolling programmes in Europe.

If you'd like to know more about ARBED's tailor-made beams or steel sections, get in touch with our sales organization.

Department Marketing  
P.O. Box 1802  
Luxembourg

Name

Position

Department

Company

Address

## TRADE ARBED

# First-order evolution in geodesy and industry

Modern technology has come up with a new precision level, the **Wild N3**, designed to bring the highest accuracy to the most varied tasks: first-order levelling for geodetic control, deformation measurements, determining subsidence and monitoring crustal movements. It's perfect too for industry and laboratories: for checking, aligning and positioning machinery, and for measuring inclinations. The powerful **panfocal telescope** has over 40× magnification at normal sighting distances, yet it will focus to a scale **only 30 cm (12 inches)** from the objective. The field of view widens at short distances. And it's an alignment telescope with remarkable stability of the line of sight. With the calibrated tilting screw, small angles and changes in inclination can be measured with micro-

meter accuracy for optical tooling purposes as well as for river crossings in geodesy. The autocollimation eyepiece converts the N3 into an autocollimation instrument; the laser eyepiece transforms it into a laser level.

The **Wild N3** is an ultramodern precision level. From its predecessor it has inherited its unmatched accuracy – a standard deviation of  $\pm 0.2$  mm for 1 km double run levelling – and its absolute reliability.

#### For colour brochure Wild N3

Send this coupon to your next Wild representative or directly to Wild Heerbrugg Ltd., CH - 9435 Heerbrugg, Switzerland.

Name \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

**Wild Heerbrugg Ltd.**  
CH-9435 Heerbrugg, Switzerland

