

Objektyp: **Advertising**

Zeitschrift: **IABSE structures = Constructions AIPC = IVBH Bauwerke**

Band (Jahr): **5 (1981)**

Heft C-17: **Bridges and formwork launching girders**

PDF erstellt am: **21.07.2024**

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.



Whenever Structural Safety is the Point... Kern Precision Instruments are the Right Choice


For measuring distances up to 2500 m:

Mekometer ME 3000

Electro-optical Precision Distance Meter with the extremely high accuracy of $\pm (0.2 \text{ mm} + 1 \text{ ppm})$ and a range of 2.5 km. Digital distance display to 0.1 mm.

Universal application: structural deformation measurements, large area slip and displacement measurements, precision layout work and fundamental surveying.

The Mekometer used for dam control measurements

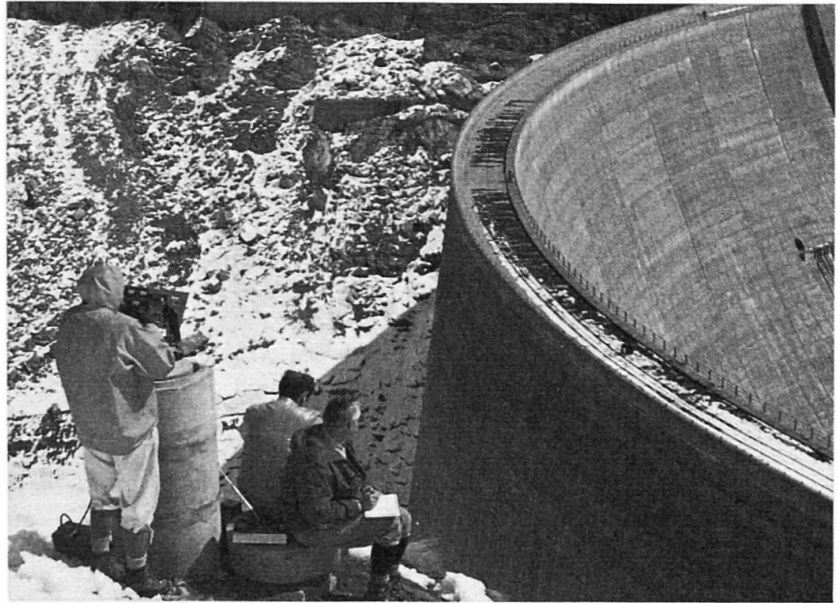

For measuring length variations within a distance range of 50 m:

Distometer ISETH

Precision instrument for accurate determination of length variations by means of Invar wires. Measuring accuracy $\pm 1 \text{ ppm}$; length of the Invar wire 1—50 m; measuring range for length variations 100 mm.

Special advantages: lengths of any inclination including vertical may be measured; simple layout of the measuring arrangement.

Application: structural deformation measurements.

The Distometer ISETH used for tunnel wall deformation measurement

Kern & Co. Ltd.
Mechanical, Optical and
Electronic Precision Instrument
CH - 5001 Aarau, Switzerland
Telex 68 106

Please send me your detailed
documentation on:

- Mekometer ME 3000
 Distometer ISETH

Name: _____

Occupation: _____

Address: _____



ARBED

Steel beams from ARBED

ARBED - manufacturers of the world's largest universal wide-flanged beam: 1000 x 450 mm. And some of the smallest: down to a mere 80 x 42 mm. Between these extremes you'll find the most comprehensive structural steel product range anywhere. Steel qualities conforming to all international standards.


Fritenar, Krytenar, arcorox, Mercor, Krybar... steel grades with exceptional properties: ideal weldability, weather and corrosion resistance and high yield point.

ARBED structural steel combined with ARBED know-how and engineering solve even the most intractable building problems. Worldwide.

Sales:

TRADE ARBED

**Société Anonyme
Boîte Postale 1802
L-Luxembourg**

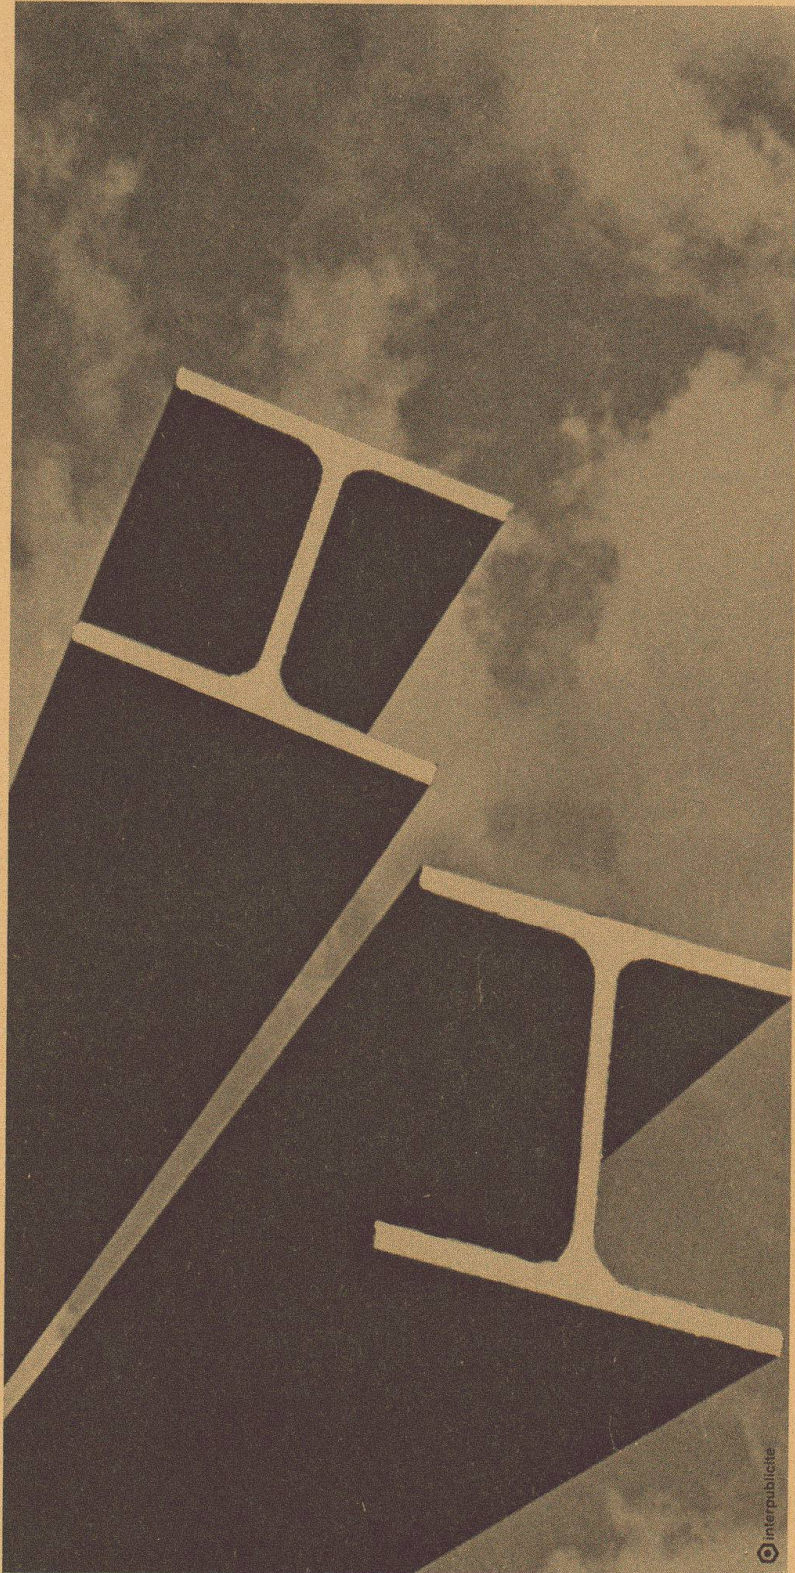

They come bigger but not better

This Wild Distomat DI4 is the smallest electronic infra-red distancer ever built. Micro-processors and modern infra-red technology give this Swiss precision instrument its high performance and make it so handy, and make you more mobile and more competitive.

Only a single pointing is needed for angles and distance (up to 2500 m), even with steep lines of sight (from -75° to zenith). With the Wild T1 and T16 theodolites, the telescope transmits with the DI4 fitted, and reduction angles are entered via a separate keyboard. Slope distance, horizontal distance, height difference or coordinate difference are dis-

played very accurately (also in the tracking mode) immediately above the telescope. Standard deviation and functional status are displayed at the touch of a key. And the DI4 automatically monitors the state of the battery, powerful enough for 1500 measurements.

As the youngest member of the successful Distomat family, the Wild DI4 gives you a maximum of comfort, performance and reliability. Every one of the 150 Wild agencies and service centres throughout the world is holding

detailed information about it ready for you. See for yourself: there isn't a smaller one – there isn't a better one!

For colour brochure Wild DI4

Send this coupon to your next Wild representative or directly to Wild Heerbrugg Ltd., CH-9435 Heerbrugg, Switzerland.

Name _____

Company _____

Address _____

SBb 11-1

Wild Heerbrugg Ltd.
CH-9435 Heerbrugg, Switzerland

New: DI4L with 5000 m range



WILD
HEERBRUGG