

# The C.F.A.N. mission tent

Autor(en): **Uddell, I**

Objektyp: **Article**

Zeitschrift: **IABSE structures = Constructions AIPC = IVBH Bauwerke**

Band (Jahr): **11 (1987)**

Heft C-41: **Tensostructures**

PDF erstellt am: **22.07.2024**

Persistenter Link: <https://doi.org/10.5169/seals-20373>

## **Nutzungsbedingungen**

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

## **Haftungsausschluss**

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.



### 4. The C.F.A.N. Mission Tent


**Owner:** Christ for All Nations, Frankfurt  
**Engineer:** Buro Happold, Bath  
**Roof Fabricator:** Clyde Canvas  
**Plan Area:** 12,000 m<sup>2</sup> (95 × 130 m)  
**Highest Masts:** 25 m  
**Clear Height:** 15 m  
**Construction Time:** 9 months  
**Service Date:** March 1986

The C.F.A.N. mobile mission tent was damaged in a storm at Cape Town. Following this, Buro Happold were appointed to re-engineer it and improve its level of safety and the installation procedures.


The original Tent had a regular plan form with all masts vertical. The fabric was a relatively light, silicone-coated glass fibre cloth and the valleys of the Tent were restrained with cables to control stresses in the cloth. The form of the Tent was modified by reducing the width at the ends and sloping the masts outward. This

reduced the size of the end fields and increased the curvature of the surface. Wind tunnel tests in a turbulent boundary layer demonstrated that the design loads were such that Type V Grade PVC/polyester fabric (strength 180 kN/m) could be used without the valley cables. Tear-stopping polyester belts were laid across the fields of cloth to minimise the extent of damage should accidental damage from cranes or witch doctors occur. The length of these belts was controlled during fabrication so that they were just loaded under prestress conditions.

For transport, the 14,000 m<sup>2</sup> of cloth was broken down into 20 pieces – the largest, 30 × 30 m, weighing 2 t. These were folded and then rolled onto spools.

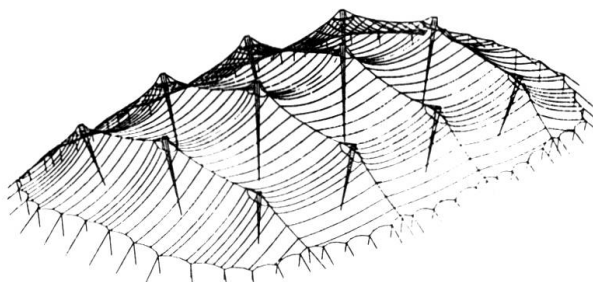


Patterning model

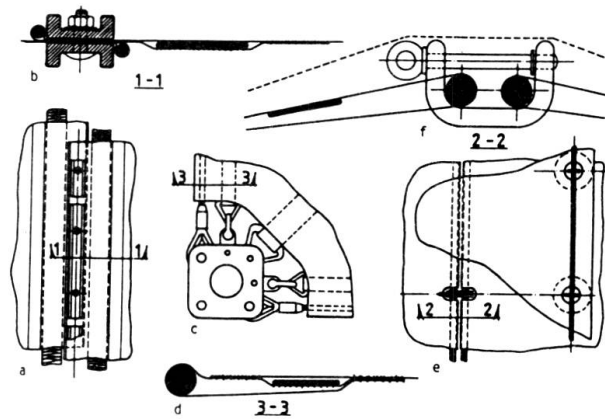


a,b Site Joint; c Corner Point Connection; d Section Thro Boundary Cuff; e,f Ridge Joint Detail

Details

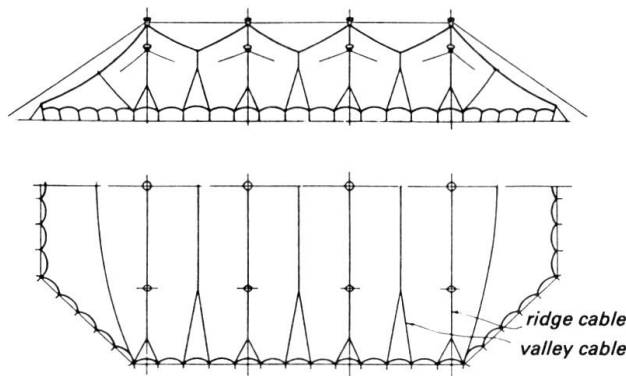

Original structure

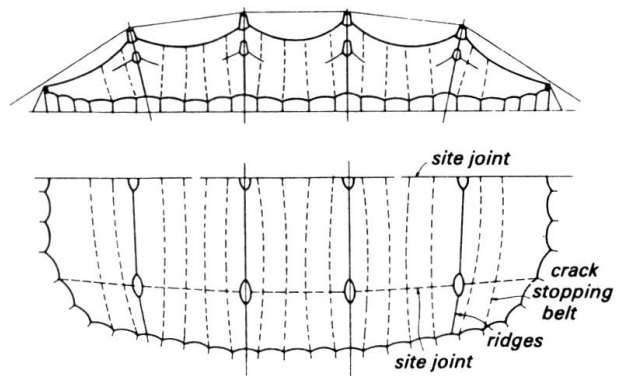


Replacement structure


Fields were jointed along the ridge lines by shackling the twinned ridge cables together at 1 m intervals and along longitudinal site joints with bolted plates. The edge details were formed with catenary cables in a bias cut cuff welded to the edge of the cloth. The ridge cables and the boundary cables were backed up with polyester belts to resist tangential forces and to prevent damage during lifting when the cables would not be correctly loaded. The field joints were also reinforced with belts to prevent spread of tearing.

The Tent was prestressed to 500 kg/m weft and 200 kg/m warp by means of winch trucks pulling back on the side masts. The corresponding strains were 4% and -1% so the extensions in the weft direction were considerable. The tie backs were adjusted by chain links hooking into shortening clutches with rigging screws for fine adjustment on the ridge lines. The ground anchors were 7-wire strands about 10 m long grouted into 100 mm holes in the soil.

*(I. Uddell)*

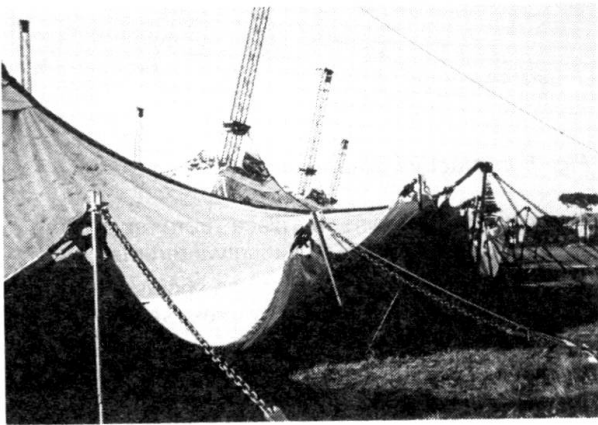

*Erection*

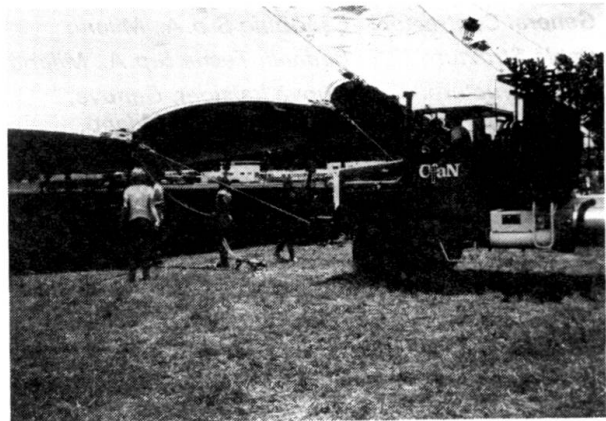

*Tensioning*



*Finished structure*