

Fastening systems for suspended rear ventilated facades

Autor(en): **Reinwarth, Peter**

Objektyp: **Article**

Zeitschrift: **IABSE reports = Rapports AIPC = IVBH Berichte**

Band (Jahr): **77 (1998)**

PDF erstellt am: **22.07.2024**

Persistenter Link: <https://doi.org/10.5169/seals-58242>

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.




Fastening Systems for Suspended Rear Ventilated Facades

Peter REINWARTH

Civil Engineer

BWM Duebel + Montagetechnik

Leinfelden-Echt., Germany

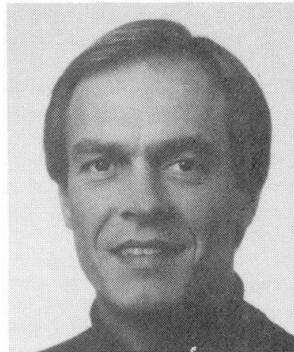

Peter Reinwarth, born in 1960, received his civil engineering degree from Stuttgart University. He is presently working with BWM - Duebel+Montagetechnik GmbH, Leinfelden-Echterdingen, Germany

Summary

The suspended rear ventilated facade in conjunction with appropriate insulation and supporting structure systems jointly offer optimal protection, preservation and embellishment for any building even in difficult situations.

Fascinating and original architectural effects can be obtained by utilising widely varying cladding material, surface structures, colours, formats, patterns, joint designs, structural sections and manifold attachment systems.

1. Rear ventilated facade

On new buildings as well as on existing buildings (maintenance, preservation and embellishment) the suspended rear ventilated facade system is the system that fulfills all the physical construction and design requirements for a facade: it insulates the structure from cold, heat and precipitation, it protects and decorates the building, it provides a comfortable environment inside the building, it saves heating energy costs, it permits diffusion of moisture.

Consequently the market offers a wide range of substructures for the different panel materials and systems with visible or hidden attachment.


In conjunction with a sophisticated anchoring the planner and architect is given a complete range of tools in order to give each facade an individually styled look.

2. Substructure principal and aspects to be considered


There are two categories of substructures (see fig. 1,2).

While the design of new buildings and their facades may be done using standard substructures, the cladding of existing buildings must be planned by taking into consideration the situation and the details of each individual building:

- additional weight from heavier facades (foundations, etc.)
- nature of the foundation for anchors (pull-tests with plugs may be necessary)
- walls may be uneven or have a strongly segmented structure (see fig. 3).
- defective zones (anchoring in certain areas impossible or too costly)
- with sandwich panels (three-layer construction): does it make sense and can the anchoring be attached to the outer cladding or should it be to the load-bearing layer ?)
- anchoring in the joint zones, corner zones (see fig. 4), etc.

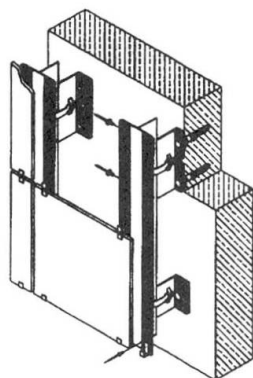


a) Excentric anchoring

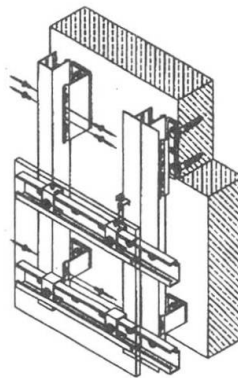


b) Centric anchoring

Fig. 1: Systems with brackets

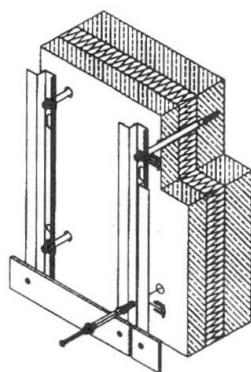

a) Fixing with distance wallplugs

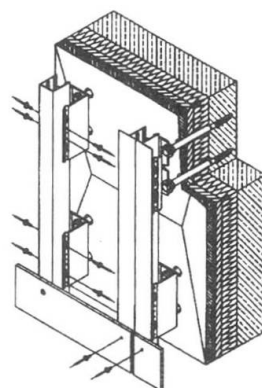

b) Fixing with distance wallplugs and brackets

Fig. 2: Distance systems

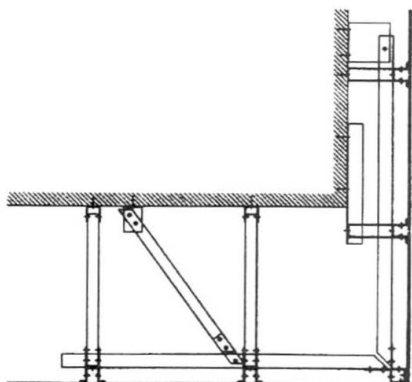


Fig. 3: Example: distance up to 700 mm

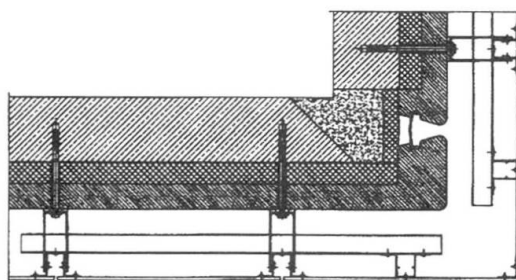


Fig. 4: outer corner WBS 70