

Zeitschrift: Swiss express : the Swiss Railways Society journal
Herausgeber: Swiss Railways Society
Band: 1 (1986-1987)
Heft: 9

Artikel: The Lima RAe TEE (4-car set)
Autor: Jesson, John
DOI: <https://doi.org/10.5169/seals-853700>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften auf E-Periodica. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Das Veröffentlichen von Bildern in Print- und Online-Publikationen sowie auf Social Media-Kanälen oder Webseiten ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. [Mehr erfahren](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. La reproduction d'images dans des publications imprimées ou en ligne ainsi que sur des canaux de médias sociaux ou des sites web n'est autorisée qu'avec l'accord préalable des détenteurs des droits. [En savoir plus](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. Publishing images in print and online publications, as well as on social media channels or websites, is only permitted with the prior consent of the rights holders. [Find out more](#)

Download PDF: 06.07.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

THE LIMA RAe TEE (4 - CAR SET) | by John Jesson

Cat. No. 9812. Additional coach Cat. No. 1005. Restaurant car Cat. No. 1006

Available in Europe since the summer of 1986, the long-awaited Lima RAe set finally arrived at Victors in December, together with the two additional coaches. It is a fine model, ingenious in its design and accurate in its dimensions, but with one or two defects which Lima should attend to if they are to join the Roco's, Liliput's, etc. of this world.

It is difficult to judge accurately the length of the individual vehicles. The drawing usually used by publications gives only the length over body, but part of this length is hidden by the inter-coach air-smoothing, I estimate this hidden part to be about 250mm at each inner end, giving the lengths I have quoted in the table.




RAe TEE unit no. 1054 races through Lugano Paradiso with the northbound "Gottardo" May 1981. Photo John Stein.

The model is powered by an enclosed 3-pole motor mounted in the centre of the power car. A flywheel is fitted at each end of the motor, and the drive is transmitted to the outer axles of both bogies through cardan shafts and bogie-mounted gear boxes. Rubber traction tyres are fitted to one pair of wheels.

Current collection from one rail is through the extreme end bogies of the unit, and from the other rail through the wheels of the powered bogies. From the end vehicles, the current is transmitted to the power car through metal couplings, which are also the means of coupling the individual coaches together. The pantographs are non operating, and are not electrically connected to the motor.


Between the coaches, the gap is filled, very effectively, by rigid plastic representations of the prototypes' air-smoothing. Just how reliable these are on very tight radius curves I cannot say, but they coped well with curves down to 2 ft. radius, including a reverse curve, although their appearance was, naturally, unprototypical.

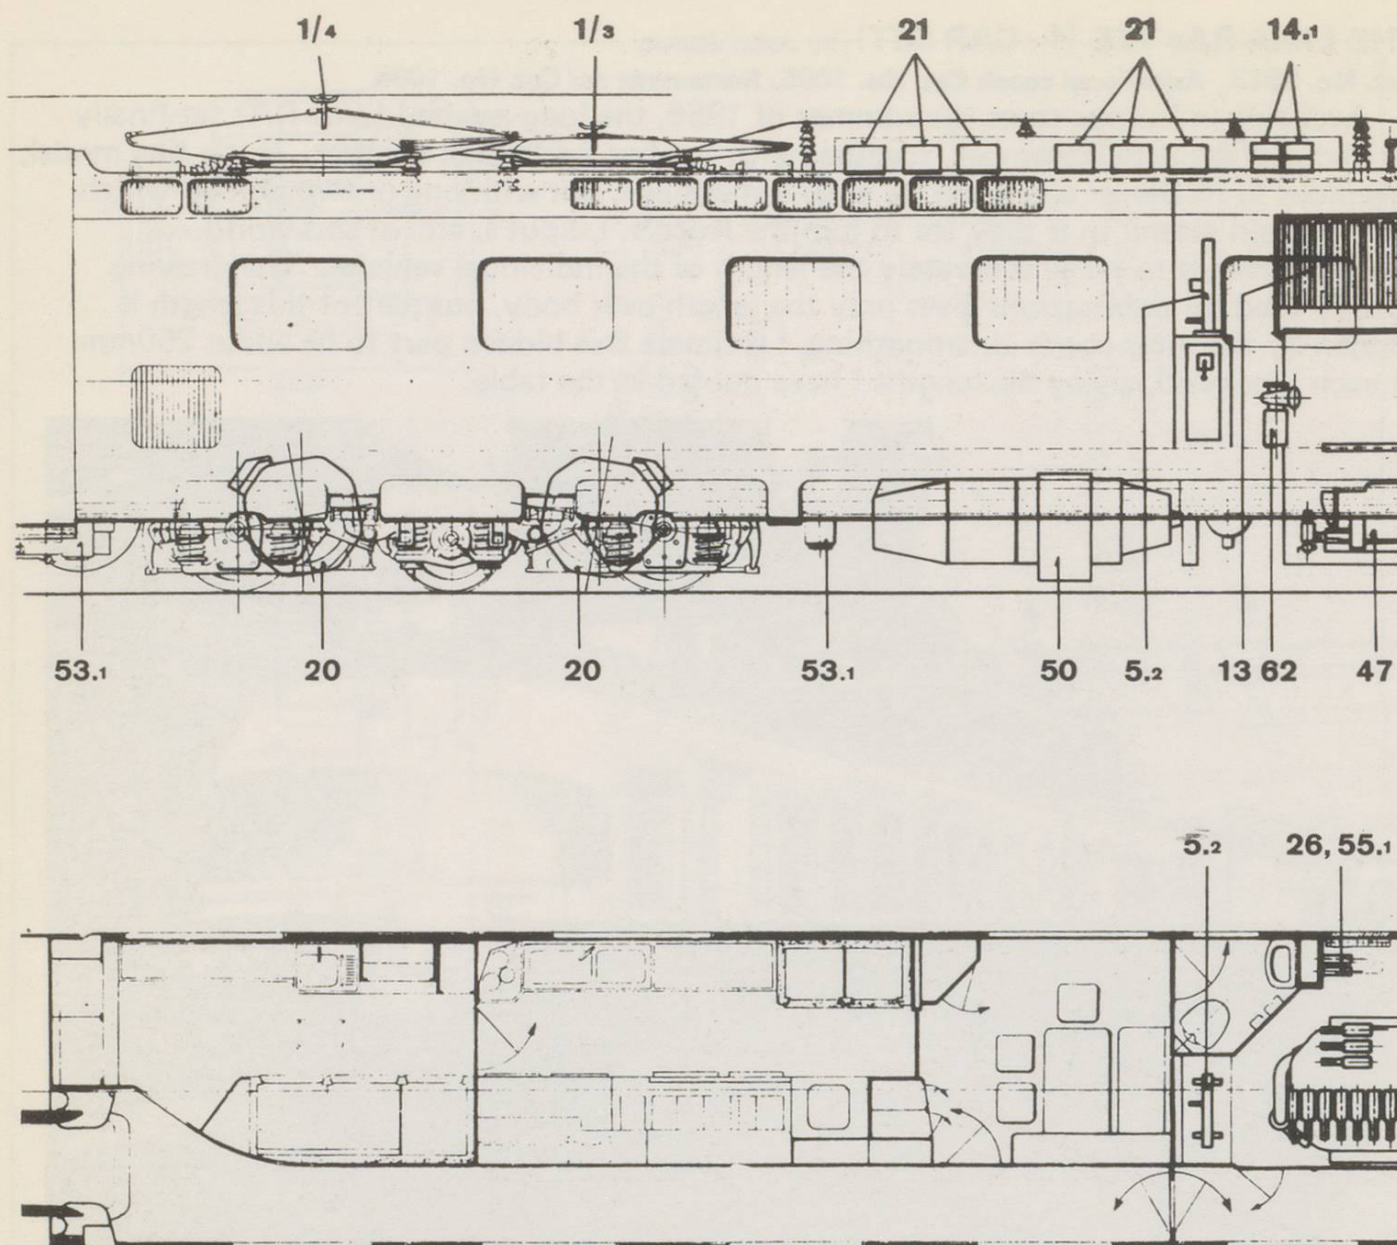

The model comes with a cutout above each bogie. Lima supply clip-in skirts to fill these gaps, but they say they are only for use with display models. ! The reason for this is that, once installed, the swing of the bogies is severely reduced or, in some cases, rendered impossible. Indeed, in one place it was impossible to even fit the skirts as the bogie was in the way.

As I wanted both the skirts and an operable model, I looked for ways to achieve both aims. The solution called for cementing the skirts in place and once the cement was thoroughly set, removing those of the fixing lugs which fouled the bogies. To give freedom of movement to the bogies under the entrance doors I found it necessary to shave off part of the step supports and also to cut away part of the bogie sideframes. This last was not a particularly easy task, but the end result is a unit which will negotiate 3 ft. radius curves, with the modifications quite invisible.

I was not too impressed by the standard of the paintwork, and got the impression that Lima had painted the models in a hurry and boxed them before completely dry. Nevertheless, my model is acceptable at normal viewing distances, and it must be said that the printed inscriptions are superb. My set of skirts are a slightly different shade of red to the main bodysides, and I have played around with a number of different paints to try to get the same shade, so far without complete success. The closest I have found is Roco 7001-Purpurrot.

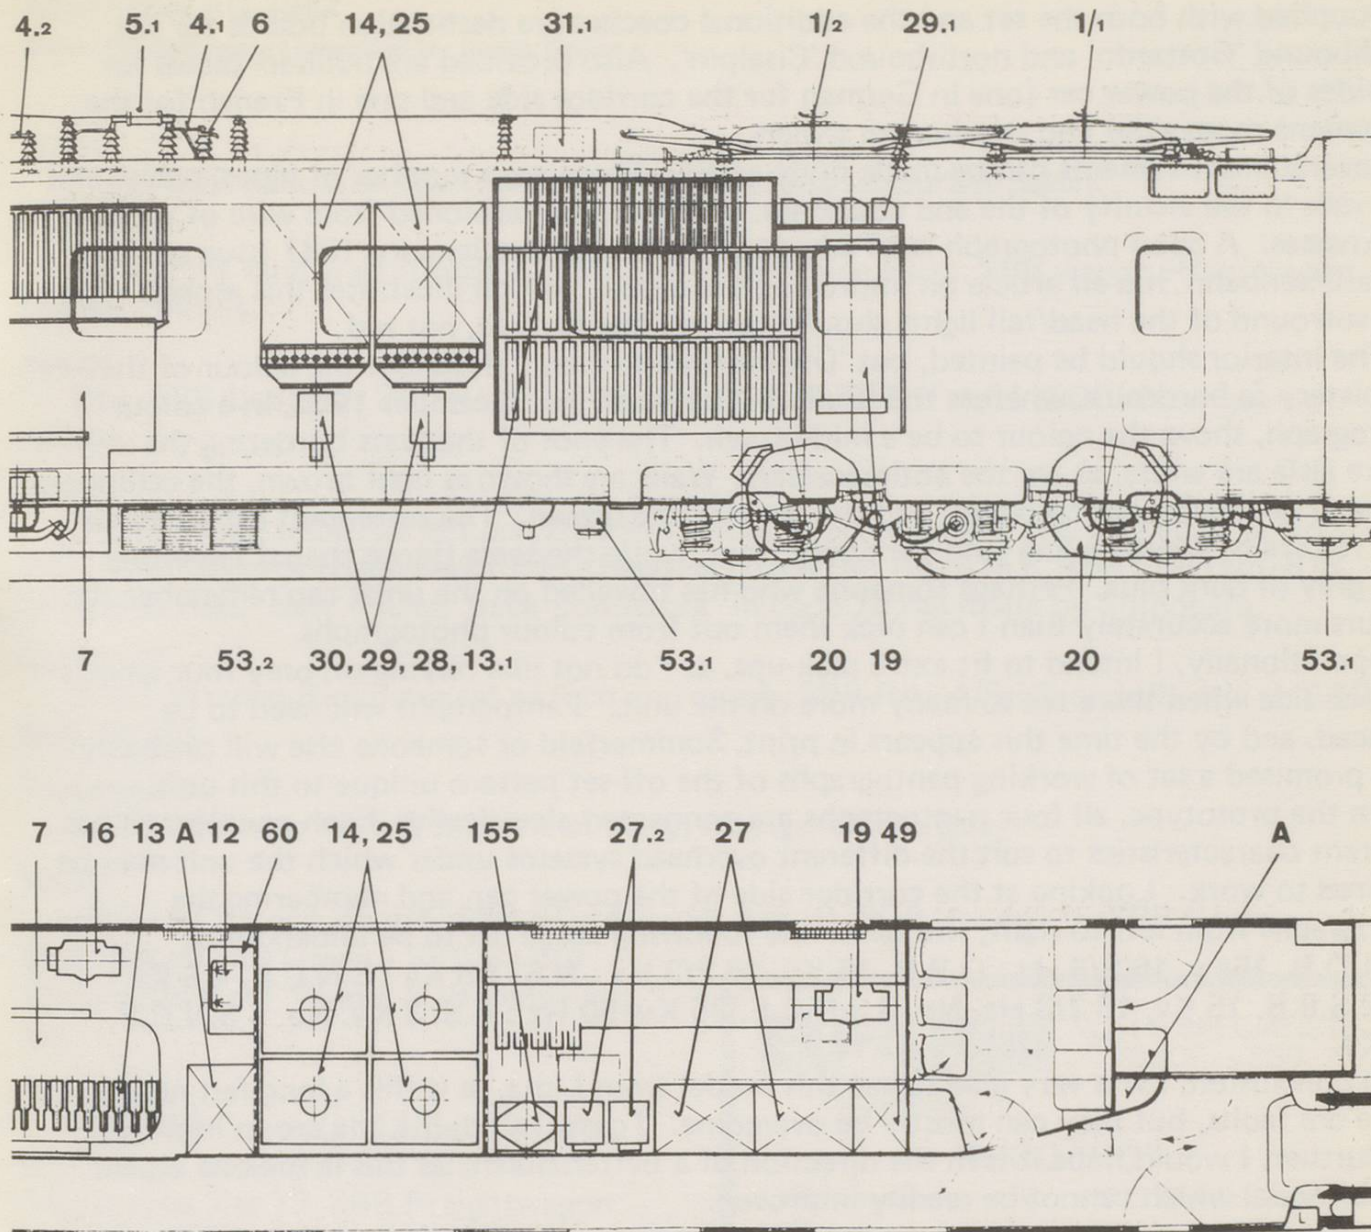

Arrangement of the electrical equipment in the motor carriage.

- | | | | |
|-------|--|------|--|
| 1/1-4 | Pantograph | 30 | Field-weakening contactor |
| 4.1 | Earthing switch | 47 | Three-phase compressor |
| 4.2 | Change-over switch earth to d.c. | 49 | Silicon rectifier for auxiliary services |
| 5.1 | Main circuit breaker for 25 kV a. c. | 50 | Converter unit for auxiliary drives |
| 5.2 | Circuit breaker for 3 kV d.c. | 53.1 | Blower motor for traction motor |
| 6 | High tension bushing 25 kV for the system selector equipment | 55.1 | Starting contactor |
| 7 | Main transformer | 60.1 | Three-phase transformer |
| 12 | Voltage transformer | 155 | Servo-controller |
| 13 | Tap-changing contactor on the transformer | A | Equipment box |
| 13.1 | Tap-changing contactor for the starting resistor | | |
| 14 | Starting and braking resistor | | |
| 14.1 | Change-over resistor | | |
| 16 | System change-over switch | | |
| 19 | Reversing and brake change-over switch | | |
| 20 | Traction motor | | |
| 21 | Pulsating d.c. shunt | | |
| 26 | Brake contactor | | |
| 27 | Silicon rectifier for traction motors | | |
| 27.2 | Electro-pneumatic isolating circuit breaker for Item 27 | | |
| 28 | Electro-pneumatic contactor for rheostatic brake | | |
| 29 | Grouping and isolating contactor | | |

Drawing supplied by
Oerlikon Engineering Company.

Supplied with both the set and the additional coaches are destination boards for the southbound 'Gottardo' and northbound 'Cisalpin'. Also provided are builders plates for the sides of the power car (one in German for the corridor side and one in French for the equipment room side) and windscreen wipers.

Several improvements can be made quite easily. There are a number of pipes, cables and grab rails in the vicinity of the end couplings, which can be fashioned from wire of various thicknesses. A good photograph is an advantage here, and the January 1987 issue of 'Die Modelleisenbahn' has an article on improving the model which illustrates this aspect. The oval surround of the head/tail lights should have a silver surface, not red.

The interior should be painted, but 'Die Modelleisenbahn' describes the colour of the upholstery as bordeaux, whereas the 'Bulletin Oerlikon' for December 1962, in a colour photograph, shows the colour to be a mid-brown. The ends of the seats bordering the centre aisle are white, as are the antimacassars. Walls are shown as light brown, the ceiling seems to be mushroom-coloured, and the carpet dark brown. The restaurant car seems to have red walls, white ceiling and dark grey floor, while the seats (loose chairs) are either dark grey or dark blue. Perhaps someone who has travelled on the units can remember the colours more accurately than I can pick them out from colour photographs.

Operationally, I intend to fit extra pick-ups, as I do not like relying on only four wheels on each side when there are so many more on the unit. Pantographs will need to be replaced, and by the time this appears in print, Sommerfeld or someone else will probably have promised a set of working pantographs of the off-set pattern unique to this unit.

On the prototype, all four pantographs are connected electrically. Each pantograph has different characteristics to suit the different overhead systems under which the unit may be required to work. Looking at the corridor side of the power car, and numbering the pantographs from left to right, will allow the following usage list to be understood.

No. 1 D.B. 15Kv, 16 2/3 Hz : O.B.B. 15 Kv, 16 2/3 Hz : N.S. 1,5 Kv : S.N.C.B. 1,5 Kv.
No. 2 S.B.B. 15 Kv, 16 2/3 Hz. No. 3 S.N.C.F. 25 Kv, 50 Hz : F.S. 3 Kv. No. 4 S.N.C.F. 1,5 Kv.

In conclusion, I was very glad to see this model from Lima, as it fills a long-felt need. There are faults, but they can mostly be overcome. To my mind, if Lima are to improve still further, I would hope it is in the direction of a better finish, as this is the one aspect of this model which cannot be readily improved.

	Length over bodyside			Height			Width		
	1:1	1:87	model	1:1	1:87	model	1:1	1:87	model
End coach	24950	286,8	286,9	4000	46,0	45,8	2840	32,6	32,8
Trailer coach	23400	269,0	269,8	4000	46,0	45,8	2840	32,6	32,7
Power car	23700	272,4	273,5	4000	46,0	46,0	2840	32,6	32,8
Restaurant	23400	269,0	270,0	4000	46,0	45,7	2840	32,6	32,5
Add. trailer	23400	269,0	269,8	4000	46,0	45,5	2840	32,6	32,6
End coach	24950	286,8	286,9	4000	46,0	45,6	2840	32,6	32,8

	Bogie centres			Bogie wheelbase		
	1:1	1:87	model	1:1	1:87	model
End coach	18300	210,3	210,3	2700	31,0	31,0
Trailer coach	18300	210,3	210,3	2700	31,0	31,0
Power car	17000	195,4	195,9	3800	43,7	43,5
Restaurant	18300	210,3	210,3	2700	31,0	31,0
Add. trailer	18300	210,3	210,3	2700	31,0	31,0
End coach	18300	210,3	210,3	2700	31,0	31,0

	1:1	1:87	model
Length of 6-car set (excluding couplers)	148925	1711,8	1709 - 1712